



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT



HEALTHY AIR LIVING™

FEB 03 2012

Mr. Raymond Rodriguez
Occidental of Elk Hills
10800 Stockdale Highway
Bakersfield, CA 93311

**Re: Proposed ATC / Certificate of Conformity (Significant Mod)
District Facility # S-382
Project # S-1114735**

Dear Mr. Rodriguez:

Enclosed for your review is the District's analysis of an application for Authority to Construct for the facility identified above. The applicant is requesting that a Certificate of Conformity with the procedural requirements of 40 CFR Part 70 be issued with this project. Occidental of Elk Hills is proposing to install a new 324 bhp Tier 3 diesel-fired emergency internal combustion (IC) engine powering an electric generator at within their emergency response facility.

After addressing any EPA comments made during the 45-day comment period, the Authority to Construct will be issued to the facility with a Certificate of Conformity. Prior to operating with modifications authorized by the Authority to Construct, the facility must submit an application to modify the Title V permit as an administrative amendment, in accordance with District Rule 2520, Section 11.5.

If you have any questions, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500.

Thank you for your cooperation in this matter.

Sincerely,

David Warner
Director of Permit Services

DW: WJ/cm

Enclosures



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT



FEB 03 2012

Gerardo C. Rios, Chief
Permits Office
Air Division
U.S. EPA - Region IX
75 Hawthorne St.
San Francisco, CA 94105

**Re: Proposed ATC / Certificate of Conformity (Significant Mod)
District Facility # S-382
Project # S-1114735**

Dear Mr. Rios:

Enclosed for your review is the District's engineering evaluation of an application for Authority to Construct for Occidental of Elk Hills located within the NW/4 of Section 2, Township 31S, Range 23E, which has been issued a Title V permit. Occidental of Elk Hills is requesting that a Certificate of Conformity, with the procedural requirements of 40 CFR Part 70, be issued with this project. Occidental of Elk Hills is proposing to install a new 324 bhp Tier 3 diesel-fired emergency internal combustion (IC) engine powering an electric generator at within their emergency response facility.

Enclosed is the engineering evaluation of this application with a copy of the current Title V permit and proposed Authority to Construct # S-382-815-0 with Certificate of Conformity. After demonstrating compliance with the Authority to Construct, the conditions will be incorporated into the facility's Title V permit through an administrative amendment.

Please submit your written comments on this project within the 45-day comment period that begins on the date you receive this letter. If you have any questions, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500.

Thank you for your cooperation in this matter.

Sincerely,

David Warner
Director of Permit Services

DW: WJ/cm

Enclosures



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT



FEB 03 2012

Mike Tollstrup, Chief
Project Assessment Branch
Air Resources Board
P O Box 2815
Sacramento, CA 95812-2815

**Re: Proposed ATC / Certificate of Conformity (Significant Mod)
District Facility # S-382
Project # S-1114735**

Dear Mr. Tollstrup:

Enclosed for your review is the District's analysis of an application for Authority to Construct for the facility identified above. The applicant is requesting that a Certificate of Conformity with the procedural requirements of 40 CFR Part 70 be issued with this project. Occidental of Elk Hills is proposing to install a new 324 bhp Tier 3 diesel-fired emergency internal combustion (IC) engine powering an electric generator at within their emergency response facility.

Enclosed is the engineering evaluation of this application with a copy of the current Title V permit and proposed Authority to Construct # S-382-815-0 with Certificate of Conformity. After demonstrating compliance with the Authority to Construct, the conditions will be incorporated into the facility's Title V permit through an administrative amendment.

Please submit your written comments on this project within the 30-day comment period that begins on the date you receive this letter. If you have any questions, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500.

Thank you for your cooperation in this matter.

Sincerely,

David Warner
Director of Permit Services

DW: WJ/cm

Enclosures

**NOTICE OF PRELIMINARY DECISION
FOR THE ISSUANCE OF AUTHORITY TO CONSTRUCT AND
THE PROPOSED SIGNIFICANT MODIFICATION OF FEDERALLY
MANDATED OPERATING PERMIT**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Air Pollution Control District solicits public comment on the proposed significant modification of Occidental of Elk Hills for its Heavy Oil Production Source located within the NW/4 of Section 2, Township 31S, Range 23E, California. Occidental of Elk Hills is proposing to install a new 324 bhp Tier 3 diesel-fired emergency internal combustion (IC) engine powering an electric generator at within their emergency response facility.

The District's analysis of the legal and factual basis for this proposed action, project #S-1114735, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. This will be the public's only opportunity to comment on the specific conditions of the modification. If requested by the public, the District will hold a public hearing regarding issuance of this modification. For additional information, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500. Written comments on the proposed initial permit must be submitted within 30 days of the publication date of this notice to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY AIR POLLUTION CONTROL DISTRICT, 34946 FLYOVER COURT, BAKERSFIELD, CA 93308-9725

**San Joaquin Valley Air Pollution Control District
Authority to Construct
Application Review
Diesel-Fired Emergency Standby IC Engine**

Facility Name: Occidental of Elk Hills (OEHI)
Mailing Address: 10800 Stockdale Highway
Bakersfield, CA 93311

Date: 12/29/11
Engineer/ Specialist: William Jones
Lead Engineer: Steve Leonard

Contact Person: Raymond Rodriguez
Telephone: 661-412-5263
Application #: S-382-815-0
Project #: S-1114735
Complete: 11/13/11



I. Proposal

Occidental of Elk Hills (OEHI) has requested an Authority to Construct (ATC) permit for the installation of a 324 bhp Tier 3 diesel-fired emergency standby internal combustion (IC) engine powering an electrical generator. The draft ATC is included in **Appendix A**.

OEHI received their Title V Permit on May 31, 2010. This modification can be classified as a Title V significant modification pursuant to Rule 2520, Section 3.29, and can be processed with a Certificate of Conformity (COC). Since the facility has specifically requested that this project be processed in that manner, the 45-day EPA comment period will be satisfied prior to the issuance of the Authority to Construct. OEHI must apply to administratively amend their Title V permit.

II. Applicable Rules

Rule 2201 New and Modified Stationary Source Review Rule (4/21/11)
Rule 2520 Federally Mandated Operating Permits (6/21/01)
Rule 4001 New Source Performance Standards (4/14/99)
Rule 4002 National Emission Standards for Hazardous Air Pollutants (5/20/04)
Rule 4101 Visible Emissions (2/17/05)
Rule 4102 Nuisance (12/17/92)
Rule 4201 Particulate Matter Concentration (12/17/92)
Rule 4701 Stationary Internal Combustion Engines – Phase 1 (8/21/03)
~~Rule 4702 Stationary Internal Combustion Engines (8/18/11)~~
Rule 4801 Sulfur Compounds (12/17/92)
CH&SC 41700 Health Risk Assessment
CH&SC 42301.6 School Notice

Title 17 CCR, Section 93115 - Airborne Toxic Control Measure (ATCM) for Stationary Compression-Ignition (CI) Engines
California Environmental Quality Act (CEQA)
Public Resources Code 21000-21177: California Environmental Quality Act (CEQA)
California Code of Regulations, Title 14, Division 6, Chapter 3, Sections 15000-15387: CEQA Guidelines

III. Project Location

The equipment will be located in the Emergency Services Center building at the Occidental of Elk Hills facility within the NW/4 of Section 2, Township 31S, Range 23E.

The District has verified that the equipment is not located within 1,000 feet of the outer boundary of a K-12 school. Therefore, the public notification requirement of California Health and Safety Code 42301.6 is not applicable to this project.

IV. Process Description

The emergency standby engine powers an electrical generator. Other than emergency standby operation, the engine may be operated up to 50 hours per year for maintenance and testing purposes.

V. Equipment Listing

S-382-815-0: 324 BHP (INTERMITTENT) CUMMINS MODEL QSB7-G5 NR3 TIER 3 CERTIFIED DIESEL-FIRED EMERGENCY STANDBY IC ENGINE POWERING AN ELECTRICAL GENERATOR

VI. Emission Control Technology Evaluation

The applicant has proposed to install a Tier 3 certified diesel-fired IC engine that is fired on very low-sulfur diesel fuel (0.0015% by weight sulfur maximum).

The proposed engine meet the latest Tier Certification requirements; therefore, the engine meets the latest ARB/EPA emissions standards for diesel particulate matter, hydrocarbons, nitrogen oxides, and carbon monoxide (see **Appendix C** for a copy of the Certification of Conformity).

The use of very low-sulfur diesel fuel (0.0015% by weight sulfur maximum) reduces SO_x emissions by over 99% from standard diesel fuel.

VII. General Calculations

A. Assumptions

Emergency operating schedule:	24 hours/day
Non-emergency operating schedule:	50 hours/year
Density of diesel fuel:	7.1 lb/gal
EPA F-factor (adjusted to 60 °F):	9,051 dscf/MMBtu
Fuel heating value:	137,000 Btu/gal
BHP to Btu/hr conversion:	2,542.5 Btu/bhp-hr
Thermal efficiency of engine:	commonly ≈ 35%
PM ₁₀ fraction of diesel exhaust:	0.96 (CARB, 1988)

B. Emission Factors

Emission Factors		
Pollutant	Emission Factor (g/bhp-hr)	Source
NO _x	2.69	Engine Manufacturer
SO _x	0.0051	Mass Balance Equation Below
PM ₁₀	0.09	ARB/EPA Certification
CO	0.67	ARB/EPA Certification
VOC	1.14	AP-42 section 3.3

$$\frac{0.000015 \text{ lb-S}}{\text{lb-fuel}} \times \frac{7.1 \text{ lb-fuel}}{\text{gallon}} \times \frac{2 \text{ lb-SO}_2}{1 \text{ lb-S}} \times \frac{1 \text{ gal}}{137,000 \text{ Btu}} \times \frac{1 \text{ bhp input}}{0.35 \text{ bhp out}} \times \frac{2,542.5 \text{ Btu}}{\text{bhp-hr}} \times \frac{453.6 \text{ g}}{\text{lb}} = 0.0051 \frac{\text{g-SO}_2}{\text{bhp-hr}}$$

C. Calculations

1. Pre-Project Emissions (PE1)

Since this is a new emissions unit, PE1 = 0.

2. Post-Project PE (PE2)

The daily and annual PE are calculated as follows:

Project Emissions (PE2)						
Pollutant	Emissions Factor (g/bhp-hr)	Rating (bhp)	Daily Hours of Operation (hrs/day)	Annual Hours of Operation (hrs/yr)	Daily PE2 (lb/day)	Annual PE2 (lb/yr)
NO _x	2.69	324	24	50	46.1	96
SO _x	0.0051	324	24	50	0.1	0
PM ₁₀	0.09	324	24	50	1.5	3
CO	0.67	324	24	50	11.5	24
VOC	1.14	324	24	50	19.5	41

3. Pre-Project Stationary Source Potential to Emit (SSPE1)

Pursuant to Section 4.9 of District Rule 2201, the Pre-Project Stationary Source Potential to Emit (SSPE1) is the Potential to Emit (PE) from all units with valid ATCs or PTOs at the Stationary Source and the quantity of Emission Reduction Credits (ERCs) which have been banked since September 19, 1991 for Actual Emissions Reductions that have occurred at the source, and which have not been used on-site.

It has been established earlier that facility emissions are already above the Offset and Major Source Thresholds for NO_x, SO_x, PM₁₀, CO, and VOC emissions; therefore, SSPE1 calculations are not necessary.

4. Post-Project Stationary Source Potential to Emit (SSPE2)

Pursuant to Section 4.10 of District Rule 2201, the Post-Project Stationary Source Potential to Emit (SSPE2) is the Potential to Emit (PE) from all units with valid ATCs or PTOs, except for emissions units proposed to be shut down as part of the Stationary Project, at the Stationary Source and the quantity of Emission Reduction Credits (ERCs) which have been banked since September 19, 1991 for Actual Emissions Reductions that have occurred at the source, and which have not been used on-site.

As discussed in Section C.3 above, since facility emissions are already above the Offset and Major Source Thresholds for NO_x, SO_x, PM₁₀, CO, and VOC emissions, SSPE2 calculations are not necessary.

5. Major Source Determination

Pursuant to Section 3.24 of District Rule 2201, a Major Source is a stationary source with post project emissions or a Post Project Stationary Source Potential to Emit (SSPE2), equal to or exceeding one or more of the following threshold values. However, Section 3.24.2 states, "for the purposes of determining major source status, the SSPE2 shall not include the quantity of emission reduction credits (ERC) which have been banked since September 19, 1991 for Actual Emissions Reductions that have occurred at the source, and which have not been used on-site."

This source is an existing Major Source for NO_x, SO_x, PM₁₀, CO, and VOC emissions and will remain a Major Source for these air contaminants.

6. Baseline Emissions (BE)

BE = Pre-project Potential to Emit for:

- Any unit located at a non-Major Source,
- Any Highly-Utilized Emissions Unit, located at a Major Source,
- Any Fully-Offset Emissions Unit, located at a Major Source, or
- Any Clean Emissions Unit, located at a Major Source.

otherwise,

BE = Historic Actual Emissions (HAE), calculated pursuant to Section 3.23

Since this is a new emissions unit, BE = PE1 = 0 for all criteria pollutants.

7. SB 288 Major Modification

SB 288 Major Modification is defined in 40 CFR Part 51.165 as "any physical change in or change in the method of operation of a major stationary source that would result in a significant net emissions increase of any pollutant subject to regulation under the Act."

As discussed in Section VII.C.5 earlier, the facility is an existing Major Source for NO_x, SO_x, PM₁₀, CO, and VOC emissions. However, the new emissions unit (S-382-815-0) independently will not emit any criteria pollutants exceeding Major Modifications thresholds as shown in the table below.

Major Modifications Thresholds for Existing Major Sources			
Pollutant	Annual emissions for unit S-382-815-0 (lb./yr.)	Threshold (lb./yr.)	Major Modification?
NO _x	96	20,000	No
SO _x	0	80,000	No
PM ₁₀	3	30,000	No
VOC	41	20,000	No

So, as determined from the table above, this project cannot cause a significant increase in emissions, and the project does not constitute a Major Modification.

8. Federal Major Modification

District Rule 2201, Section 3.18 states that Federal Major Modifications are the same as "Major Modification" as defined in 40 CFR 51.165 and part D of Title I of the CAA.

The determination of Federal Major Modification is based on a two-step test. For the first step, only the emission *increases* are counted. Emission decreases may not cancel out the increases for this determination.

Step 1

For new emissions units, the increase in emissions is equal to the PE2 for each new unit included in this project.

The project's combined total emission increases are calculated and compared to the Federal Major Modification Thresholds in the following table.

Federal Major Modification Thresholds for Emission Increases			
Pollutant	Total Emissions Increases (lb/yr)**	Thresholds (lb/yr)	Federal Major Modification?
NO _x *	96	0	Yes
VOC*	41	0	Yes
PM ₁₀	3	30,000	No
PM _{2.5}	0	20,000	No
SO _x	0	80,000	No

*If there is any emission increases in NO_x or VOC, this project is a Federal Major Modification and no further analysis is required.

As shown above this project triggers a Federal Major modification for NO_x and VOC. However since the Federal Major Modification Thresholds have not been surpassed for PM₁₀, PM_{2.5} and/or SO_x emissions, Step 2 is not required.

9. Quarterly Net Emissions Change (QNEC)

The QNEC is calculated solely to establish emissions that are used to complete the District's PAS emissions profile screen. Detailed QNEC calculations are included in **Appendix E**.

VIII. Compliance

Rule 2201 New and Modified Stationary Source Review Rule

A. Best Available Control Technology (BACT)

1. BACT Applicability

BACT requirements are triggered on a pollutant-by-pollutant basis and on an emissions unit-by-emissions unit basis for the following*:

- a. Any new emissions unit with a potential to emit exceeding two pounds per day,
- b. The relocation from one Stationary Source to another of an existing emissions unit with a potential to emit exceeding two pounds per day,
- c. Modifications to an existing emissions unit with a valid Permit to Operate resulting in an AIPE exceeding two pounds per day, and/or
- d. Any new or modified emissions unit, in a stationary source project, which results in an SB288 Major Modification or a Federal Major Modification, as defined by the rule.

*Except for CO emissions from a new or modified emissions unit at a Stationary Source with an SSPE2 of less than 200,000 pounds per year of CO.

a. New emissions units – PE > 2 lb/day

As discussed in Section I, the facility is proposing to install a new emergency standby IC engine. Therefore, BACT is triggered if the daily emissions exceed 2.0 lb/day for any pollutant.

The daily emissions from the new engine are compared to the BACT threshold levels in the following table:

New Emissions Unit BACT Applicability				
Pollutant	Daily Emissions for unit -815-0 (lb/day)	BACT Threshold (lb/day)	SSPE2 (lb/yr)	BACT Triggered?
NO _x	46.1	> 2.0	n/a	Yes
SO _x	0.1	> 2.0	n/a	No
PM ₁₀	1.5	> 2.0	n/a	No
CO	11.5	> 2.0 and SSPE2 ≥ 200,000 lb/yr	n/a	Yes
VOC	19.5	> 2.0	n/a	Yes

As shown above, BACT will be triggered for NO_x, CO, and VOC emissions from the proposed emergency engine.

b. Relocation of emissions units – PE > 2 lb/day

As discussed in Section I above, there are no emissions units being relocated from one stationary source to another; therefore BACT is not triggered.

c. Modification of emissions units – AIPE > 2 lb/day

As discussed in Section I above, there are no modified emissions units associated with this project; therefore BACT is not triggered.

d. SB 288/Federal Major Modification

As discussed in Section VII.C.7 above, this project constitutes a Federal Major Modification for NO_x and VOC emissions; therefore BACT is triggered for NO_x and VOC for all emissions units in the project for which there is an emission increase.

2. BACT Guideline

BACT Guideline 3.1.1, which appears in **Appendix B** of this report, covers diesel-fired emergency IC engines.

3. Top Down BACT Analysis

Per District Policy APR 1305, Section IX, "A top-down BACT analysis shall be performed as a part of the Application Review for each application subject to the BACT requirements pursuant to the District's NSR Rule for source categories or classes covered in the BACT Clearinghouse, relevant information under each of the following steps may be simply cited from the Clearinghouse without further analysis."

Pursuant to the attached Top-Down BACT Analysis, which appears in **Appendix B** of this report, BACT is satisfied with:

- NO_x: Latest EPA Tier Certification level for applicable horsepower range
- VOC: Latest EPA Tier Certification level for applicable horsepower range
- CO: Latest EPA Tier Certification level for applicable horsepower range

B. Offsets

Since emergency IC engines are exempt from the offset requirements of Rule 2201, per Section 4.6.2, offsets are not required for this engine, and no offset calculations are required.

C. Public Notification

1. Applicability

Public noticing is required for:

- a. New Major Sources, SB288 Major Modifications, Federal Major Modifications

As demonstrated in VII.C.7, this project is a Federal Major Modification; therefore, public noticing for Federal Major Modification purposes is required.

- b. Any new emissions unit with a Potential to Emit greater than 100 pounds during any one day for any pollutant

As calculated in Section VII.C.2, daily emissions for all pollutants are less than 100 lb/day.

- c. Any project which results in the offset thresholds being surpassed

As shown in Section VII.C.4, an offset threshold will not be surpassed.

- d. Any project with a Stationary Source Project Increase in Permitted Emissions (SSIPE) greater than 20,000 lb/year for any pollutant.

For this project, the proposed engine is the only emissions source that will generate an increase in Potential to Emit. Since the proposed engine emissions are well below 20,000 lb/year for all pollutants (See Section VII.C.2), the SSIPE for this project will be below the public notice threshold.

2. Public Notice Action

As discussed above, public noticing is required for this project for surpassing the threshold for being a Federal Major Modification for NO_x and VOC. Therefore, public notice documents will be submitted to the California Air Resources Board (CARB) and a public notice will be published in a local newspaper of general circulation prior to the issuance of the ATC for this equipment.

In addition, this facility is a Title V facility and has requested that the ATC issued as a result of this project be issued with a COC (as discussed previously in Section I). Therefore, COC notice documents will be submitted to the Environmental Protection Agency (EPA) prior to the issuance of the ATC for this equipment.

D. Daily Emissions Limits

Daily Emissions Limitations (DELs) and other enforceable conditions are required by Section 3.16 to restrict a unit's maximum daily emissions, to a level at or below the emissions associated with the maximum design capacity. Per Sections 3.16.1 and 3.16.2, the DEL must be contained in the latest ATC and contained in or enforced by the latest PTO and enforceable, in a practicable manner, on a daily basis. Therefore, the following conditions will be listed on the ATC to ensure compliance:

- Emissions from this IC engine shall not exceed any of the following limits: 2.69 g-NO_x/bhp-hr, 0.67 g-CO/bhp-hr, or 1.14 g-VOC/bhp-hr. [District Rule 2201, 17 CCR 93115, and 40 CFR Part 60 Subpart III]
- Emissions from this IC engine shall not exceed 0.09 g-PM₁₀/bhp-hr based on USEPA certification using ISO 8178 test procedure. [District Rules 2201 and 4102, 17 CCR 93115, and 40 CFR Part 60 Subpart III]
- Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801, 17 CCR 93115, and 40 CFR Part 60 Subpart III]

E. Compliance Assurance

1. Source Testing

Pursuant to District Policy APR 1705, source testing is not required for emergency standby IC engines to demonstrate compliance with Rule 2201.

2. Monitoring

No monitoring is required to demonstrate compliance with Rule 2201.

3. Recordkeeping

Recordkeeping requirements, in accordance with District Rule 4702, will be discussed in Section VIII, *District Rule 4702*, of this evaluation.

4. Reporting

No reporting is required to ensure compliance with Rule 2201.

F. Ambient Air Quality Analysis (AAQA)

Section 4.14.1 of this rule requires that an ambient air quality analysis (AAQA) be conducted for the purpose of determining whether a new or modified Stationary Source will cause or make worse a violation of an air quality standard. The Technical Services Division of the SJVAPCD conducted the required analysis.

As shown by the AAQA summary sheet in **Appendix D**, the proposed equipment will not cause or make worse a violation of an air quality standard for NO_x, CO, PM₁₀, or SO_x.

G. Compliance Certification

Section 4.15.2 of this Rule requires the owner of a new Major Source or a source undergoing a Title I Modification to demonstrate to the satisfaction of the District that all other Major Sources owned by such person and operating in California are in compliance or are on a schedule for compliance with all applicable emission limitations and standards. As discussed in Sections VIII-Rule 2201-C.1.a and VIII-Rule 2201-C.1.b, this facility is a new major source and this project does constitute a Title I modification, therefore this requirement is applicable. Included in **Appendix C** is OEHI Corporation's compliance certification.

H. Alternate Siting Analysis

The current project occurs at an existing facility. The applicant proposes to install a 324 bhp (intermittent) diesel-fired emergency standby IC engine powering an electrical generator.

Since the project will provide an emergency diesel-fired emergency standby IC engine to be used at the same location, the existing site will result in the least possible impact from the project. Alternative sites would involve the relocation and/or construction of various support structures on a much greater scale, and would therefore result in a much greater impact.

Rule 2520 Federally Mandated Operating Permits

This facility is subject to this Rule, and has received their Title V Operating Permit. The proposed modification is a Significant Modification to the Title V Permit pursuant to Section 3.29 of this rule. As discussed previously in the proposal section, the facility has applied for a Certificate of Conformity (COC). Therefore, the following conditions will be listed on the ATC:

- {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District NSR Rule]
- {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4]

In addition, the facility must apply to modify their Title V permit with an administrative amendment, prior to operating with the proposed modifications. Continued compliance with this rule is expected.

Rule 4001 New Source Performance Standards (NSPS)

40 CFR 60 Subpart III – Standards of Performance for Stationary Compression Ignition Internal Combustion Engines

The following table demonstrates how the proposed engine will comply with the requirements of 40 CFR Part 60 Subpart III.

40 CFR 60 Subpart III Requirements for New Emergency IC Engines Powering Generators (2007 and Later Model Year)	Proposed Method of Compliance with 40 CFR 60 Subpart III Requirements
Engine(s) must meet the appropriate Subpart III emission standards for new engines, based on the model year, size, and number of liters per cylinder.	The applicant has proposed the use of engine(s) that are certified to the latest EPA Tier Certification level for the applicable horsepower range, guaranteeing compliance with the emission standards of Subpart III.
Engine(s) must be fired on 500 ppm sulfur content fuel or less, and fuel with a minimum centane index of 40 or a maximum aromatic content of 35 percent by volume. Starting in October 1, 2010, the maximum allowable sulfur fuel content will be lowered to 15 ppm.	The applicant has proposed the use of CARB certified diesel fuel, which meets all of the fuel requirements listed in Subpart III. A permit condition enforcing this requirement was included earlier in this evaluation.
The operator/owner must install a non-resettable hour meter prior to startup of the engine(s).	The applicant has proposed to install a non-resettable hour meter. The following condition will be included on the permit: <ul style="list-style-type: none"> • This engine shall be equipped with an

	operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702, 17 CCR 93115, and 40 CFR 60 Subpart IIII]
Emergency engine(s) may be operated for the purpose of maintenance and testing up to 100 hours per year. There is no limit on emergency use.	The Air Toxic Control Measure for Stationary Compression Ignition Engines (Stationary ATCM) limits this engine maintenance and testing to 50 hours/year. Thus, compliance is expected.
The owner/operator must operate and maintain the engine(s) and any installed control devices according to the manufacturers written instructions.	The following condition will be included on the permit: <ul style="list-style-type: none"> This engine shall be operated and maintained in proper operating condition as recommended by the engine manufacturer or emissions control system supplier. [District Rule 4702 and 40 CFR 60 Subpart IIII]

Rule 4002 National Emission Standards for Hazardous Air Pollutants

40 CFR 63 Subpart ZZZZ – National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Emissions (RICE)

Emergency engines are subject to this subpart if they are operated at a major or area source of Hazardous Air Pollutant (HAP) emissions. A major source of HAP emissions is a facility that has the potential to emit any single HAP at a rate of 10 tons/year or greater or any combinations of HAPs at a rate of 25 tons/year or greater. An area source of HAPs is a facility is not a major source of HAPs. The proposed engine is new stationary RICE located at an area source of HAP emissions; therefore, this engine is subject to this Subpart.

40 CFR 63 Subpart ZZZZ requires the following engines to comply with 40 CFR 60 Subpart IIII:

1. New emergency engines located at area sources of HAPs
2. Emergency engines rated less than or equal to 500 bhp and located at major sources of HAPs

The proposed engine will be in compliance with 40 CFR 60 Subpart IIII.

Additionally, 40 CFR 63 Subpart ZZZZ requires engines rated greater 500 bhp and located at major sources of HAPs to meet the notification requirements of §63.6645(h); however, that section only applies if an initial performance test is required. Since an initial performance test is not required for emergency engines, the notification requirement is not applicable.

The proposed engines are expected to be in compliance with 40 CFR 63 Subpart ZZZZ.

Rule 4101 Visible Emissions

Rule 4101 states that no air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. Therefore, the following condition will be listed on the ATC to ensure compliance:

- {15} No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

Rule 4102 Nuisance

Rule 4102 states that no air contaminant shall be released into the atmosphere which causes a public nuisance. Public nuisance conditions are not expected as a result of these operations, provided the equipment is well maintained. Therefore, the following condition will be listed on the ATC to ensure compliance:

- {98} No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]

California Health & Safety Code 41700 (Health Risk Assessment)

District Policy APR 1905 - Risk Management Policy for Permitting New and Modified Sources (dated 3/2/01) specifies that for an increase in emissions associated with a proposed new source or modification, the District perform an analysis to determine the possible impact to the nearest resident or worksite. Therefore, a risk management review (RMR) was performed for this project. The RMR results are summarized in the following table, and can be seen in detail in Appendix D.

RMR Results				
Unit	Acute Hazard Index	Chronic Hazard Index	Cancer Risk	T-BACT Required?
S-382-815-0	N/A	N/A	0.01 in a million	No

The following conditions will be listed on the ATC to ensure compliance with the RMR:

Unit # 815-0

1. Emissions from this IC engine shall not exceed **0.09** g-PM10/bhp-hr based on USEPA certification using ISO 8178 test procedure. [District Rules 2201 N

2. {1898} The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap, roof overhang, or any other obstruction. [District Rule 4102] N
3. {3481} This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations. Operation of the engine for maintenance, testing, and required regulatory purposes shall not exceed 50 hours per calendar year. [District Rule 4702 and 17 CCR 93115] N

Rule 4201 Particulate Matter Concentration

Rule 4201 limits particulate matter emissions from any single source operation to 0.1 g/dscf, which, as calculated below, is equivalent to a PM₁₀ emission factor of 0.4 g-PM₁₀/bhp-hr.

$$0.1 \frac{\text{grain-PM}}{\text{dscf}} \times \frac{\text{g}}{15.43 \text{ grain}} \times \frac{1 \text{ Btu}_{in}}{0.35 \text{ Btu}_{out}} \times \frac{9,051 \text{ dscf}}{10^6 \text{ Btu}} \times \frac{2,542.5 \text{ Btu}}{1 \text{ bhp-hr}} \times \frac{0.96 \text{ g-PM}_{10}}{1 \text{ g-PM}} = 0.4 \frac{\text{g-PM}_{10}}{\text{bhp-hr}}$$

The new engine has a PM₁₀ emission factor less than 0.4 g/bhp-hr. Therefore, compliance is expected and the following condition will be listed on the ATC:

- {14} Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201]

Rule 4701 Internal Combustion Engines – Phase 1

The purpose of this rule is to limit the emissions of nitrogen oxides (NO_x), carbon monoxide (CO), and volatile organic compounds (VOC) from internal combustion engines. Except as provided in Section 4.0, the provisions of this rule apply to any internal combustion engine, rated greater than 50 bhp, that requires a PTO.

The proposed engine is also subject to District Rule 4702, Internal Combustion Engines. Since emissions limits of District Rule 4702 and all other requirements are equivalent or more stringent than District Rule 4701 requirements, compliance with District Rule 4702 requirements will satisfy requirements of District Rule 4701.

Rule 4702 Internal Combustion Engines

The following table demonstrates how the proposed engine(s) will comply with the requirements of District Rule 4702.

District Rule 4702 Requirements Emergency Standby IC Engines	Proposed Method of Compliance with District Rule 4702 Requirements
Operation of emergency standby engines is limited to 100 hours or less per calendar year for non-emergency purposes, verified through the use of a non-resettable elapsed operating time	The Air Toxic Control Measure for Stationary Compression Ignition Engines (Stationary ATCM) limits this engine maintenance and testing to 50 hours/year. Thus, compliance is expected.

meter.	
<p>Emergency standby engines cannot be used to reduce the demand for electrical power when normal electrical power line service has not failed, or to produce power for the electrical distribution system, or in conjunction with a voluntary utility demand reduction program or interruptible power contract.</p>	<p>The following conditions will be included on the permit:</p> <ul style="list-style-type: none"> • {3807} An emergency situation is an unscheduled electrical power outage caused by sudden and reasonably unforeseen natural disasters or sudden and reasonably unforeseen events beyond the control of the permittee. [District Rule 4702] • {3808} This engine shall not be used to produce power for the electrical distribution system, as part of a voluntary utility demand reduction program, or for an interruptible power contract. [District Rule 4702]
<p>The owner/operator must operate and maintain the engine(s) and any installed control devices according to the manufacturers written instructions.</p>	<p>A permit condition enforcing this requirement was shown earlier in the evaluation.</p>
<p>The owner/operator must monitor the operational characteristics of each engine as recommended by the engine manufacturer or emission control system supplier.</p>	<p>The following condition will be included on the permit:</p> <ul style="list-style-type: none"> • {3478} During periods of operation for maintenance, testing, and required regulatory purposes, the permittee shall monitor the operational characteristics of the engine as recommended by the manufacturer or emission control system supplier (for example: check engine fluid levels, battery, cables and connections; change engine oil and filters; replace engine coolant; and/or other operational characteristics as recommended by the manufacturer or supplier). [District Rule 4702]
<p>Records of the total hours of operation of the emergency standby engine, type of fuel used, purpose for operating the engine, all hours of non-emergency and emergency operation, and support documentation must be maintained. All records shall be retained for a period of at least five years, shall be readily available, and be made available to the APCO upon request.</p>	<p>The following conditions will be included on the permit:</p> <ul style="list-style-type: none"> • {3496} The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.) and records of operational characteristics monitoring. For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule.

	<p>[District Rule 4702 and 17 CCR 93115]</p> <ul style="list-style-type: none"> • The permittee shall maintain monthly records of the type of fuel purchased. [District Rule 4702 and 17 CCR 93115] • {3475} All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rule 4702 and 17 CCR 93115]
--	--

Rule 4801 Sulfur Compounds

Rule 4801 requires that sulfur compound emissions (as SO₂) shall not exceed 0.2% by volume. Using the ideal gas equation, the sulfur compound emissions are calculated as follows:

$$\text{Volume SO}_2 = (n \times R \times T) \div P$$

n = moles SO₂

T (standard temperature) = 60 °F or 520 °R

$$R \text{ (universal gas constant)} = \frac{10.73 \text{ psi} \cdot \text{ft}^3}{\text{lb} \cdot \text{mol} \cdot \text{°R}}$$

$$\frac{0.000015 \text{ lb} - \text{S}}{\text{lb} - \text{fuel}} \times \frac{7.1 \text{ lb}}{\text{gal}} \times \frac{64 \text{ lb} - \text{SO}_2}{32 \text{ lb} - \text{S}} \times \frac{1 \text{ MMBtu}}{9,051 \text{ scf}} \times \frac{1 \text{ gal}}{0.137 \text{ MMBtu}} \times \frac{\text{lb} - \text{mol}}{64 \text{ lb} - \text{SO}_2} \times \frac{10.73 \text{ psi} \cdot \text{ft}^3}{\text{lb} - \text{mol} \cdot \text{°R}} \times \frac{520 \text{ °R}}{14.7 \text{ psi}} \times 1,000,000 = 1.0 \text{ ppmv}$$

Since 1.0 ppmv is ≤ 2,000 ppmv, this engine is expected to comply with Rule 4801. Therefore, the following condition will be listed on the ATC to ensure compliance:

- Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801, 17 CCR 93115, and 40 CFR Part 60 Subpart III]

California Health & Safety Code 42301.6 (School Notice)

The District has verified that this site is not located within 1,000 feet of a school. Therefore, pursuant to California Health and Safety Code 42301.6, a school notice is not required.

Title 17 California Code of Regulations (CCR), Section 93115 - Airborne Toxic Control Measure (ATCM) for Stationary Compression-Ignition (CI) Engines

The following table demonstrates how the proposed engine will comply with the requirements of Title 17 CCR Section 93115.

<p>Title 17 CCR Section 93115 Requirements for New Emergency IC Engines Powering Electrical Generators</p>	<p>Proposed Method of Compliance with Title 17 CCR Section 93115 Requirements</p>
<p>Emergency engine(s) must be fired on CARB diesel fuel, or an approved alternative diesel fuel.</p>	<p>The applicant has proposed the use of CARB certified diesel fuel. The proposed permit condition, requiring the use of CARB certified diesel fuel, was included earlier in this evaluation.</p>
<p>The engine(s) must emit diesel PM at a rate less than or equal to 0.15 g/bhp-hr or must meet the diesel PM standard, as specified in the Off-road compression ignition standards for off-road engines with the same maximum rated power (Title 13 CCR, Section 2423).</p>	<p>The applicant has proposed the use of engine(s) that are certified to the latest EPA Tier Certification level for the applicable horsepower range, guaranteeing compliance with the emission standards of Subpart IIII. Additionally, the proposed diesel PM emissions rate is less than or equal to 0.15 g/bhp-hr.</p>
<p>The engine may not be operated more than 50 hours per year for maintenance and testing purposes.</p>	<p>The following condition will be included on the permit:</p> <ul style="list-style-type: none"> • This engine shall be operated only for testing and maintenance of the engine, required regulatory purposes, and during emergency situations. Operation of the engine for maintenance, testing, and required regulatory purposes shall not exceed 50 hours per calendar year. [District Rule 4702, 17 CCR 93115 and 40 CFR Part 60 Subpart IIII]
<p>New stationary emergency standby diesel-fueled CI engines (> 50 bhp) must meet the standards for off-road engines of the same model year and maximum rated power as specified in the Off-Road Compression Ignition Engine Standards (title 13, CCR, section 2423).</p>	<p>The applicant has proposed the use of engine(s) that are certified to the latest EPA Tier Certification level for the applicable horsepower range.</p>
<p>Engines, with a PM10 emissions rate greater than 0.01 g/bhp-hr and located at schools, may not be operated for maintenance and testing whenever there is a school sponsored activity on the grounds. Additionally, engines located within 500 feet of school grounds may not be operated for maintenance and testing between 7:30 AM and 3:30 PM</p>	<p>The District has verified that this engine is not located within 500' of a school.</p>
<p>An owner or operator shall maintain monthly records of the following:</p>	<p>Permit conditions enforcing these requirements were shown earlier in the evaluation.</p>

emergency use hours of operation; maintenance and testing hours of operation; hours of operation for emission testing; initial start-up testing hours; hours of operation for all other uses; and the type of fuel used. All records shall be retained for a minimum of 36 months.	
--	--

California Environmental Quality Act (CEQA)

The California Environmental Quality Act (CEQA) requires each public agency to adopt objectives, criteria, and specific procedures consistent with CEQA Statutes and the CEQA Guidelines for administering its responsibilities under CEQA, including the orderly evaluation of projects and preparation of environmental documents. The San Joaquin Valley Unified Air Pollution Control District (District) adopted its *Environmental Review Guidelines* (ERG) in 2001. The basic purposes of CEQA are to:

- Inform governmental decision-makers and the public about the potential, significant environmental effects of proposed activities.
- Identify the ways that environmental damage can be avoided or significantly reduced.
- Prevent significant, avoidable damage to the environment by requiring changes in projects through the use of alternatives or mitigation measures when the governmental agency finds the changes to be feasible.
- Disclose to the public the reasons why a governmental agency approved the project in the manner the agency chose if significant environmental effects are involved.

The District performed an Engineering Evaluation (this document) for the proposed project and determined that the project qualifies for ministerial approval under the District's Guideline for Expedited Application Review (GEAR). Section 21080 of the Public Resources Code exempts from the application of CEQA those projects over which a public agency exercises only ministerial approval. Therefore, the District finds that this project is exempt from the provisions of CEQA.

IX. Recommendation

Compliance with all applicable rules and regulations is expected. Issue Authority to Construct S-382-815-0 subject to the permit conditions on the attached draft Authority to Construct in **Appendix A**.

X. Billing Information

Billing Schedule			
Permit Number	Fee Schedule	Fee Description	Fee Amount
S-382-815-0	3020-10-C	345 bhp IC engine	\$240.00

Appendixes

- A. Draft ATC and Emissions Profile
- B. BACT Guideline and BACT Analysis
- C. Certification of Conformity
- D. HRA and AAQA Summary
- E. QNEC Calculations

Appendix A
Draft ATC and Emissions Profile

San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

ISSUANCE DATE: DRAFT

PERMIT NO: S-382-815-0

LEGAL OWNER OR OPERATOR: OCCIDENTAL OF ELK HILLS INC
MAILING ADDRESS: 10800 STOCKDALE HIGHWAY
BAKERSFIELD, CA 93311

LOCATION: LIGHT OIL WESTERN STATIONARY SOURCE
KERN COUNTY, CA

EQUIPMENT DESCRIPTION:

324 BHP (INTERMITTENT) CUMMINS MODEL QSB7-G5 NR3 TIER 3 CERTIFIED DIESEL-FIRED EMERGENCY
STANDBY IC ENGINE POWERING AN ELECTRICAL GENERATOR

CONDITIONS

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. {1829} The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
4. {14} Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201]
5. {15} No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]
6. {98} No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
7. {1898} The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap (flapper ok), roof overhang, or any other obstruction. [District Rule 4102]
8. {4257} This engine shall be equipped with an operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702, 17 CCR 93115, and 40 CFR 60 Subpart IIII]

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DAVID WARNER, Director of Permit Services

S-382-815-0 : Jan 28 2012 8:01AM - JONESW : Joint Inspection NOT Required

Southern Regional Office • 34946 Flyover Court • Bakersfield, CA 93308 • (661) 392-5500 • Fax (661) 392-5585

9. {4258} Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801, 17 CCR 93115, 40 CFR Part 60 Subpart IIII]
10. Emissions from this IC engine shall not exceed any of the following limits: 2.69 g-NO_x/bhp-hr, 0.67 g-CO/bhp-hr, or 1.14 g-VOC/bhp-hr. [District Rule 2201, 17 CCR 93115, and 40 CFR Part 60 Subpart IIII]
11. Emissions from this IC engine shall not exceed 0.09 g-PM₁₀/bhp-hr based on USEPA certification using ISO 8178 test procedure. [District Rules 2201 and 4102, 17 CCR 93115, and 40 CFR Part 60 Subpart IIII]
12. {4261} This engine shall be operated and maintained in proper operating condition as recommended by the engine manufacturer or emissions control system supplier. [District Rule 4702 and 40 CFR 60 Subpart IIII]
13. {3478} During periods of operation for maintenance, testing, and required regulatory purposes, the permittee shall monitor the operational characteristics of the engine as recommended by the manufacturer or emission control system supplier (for example: check engine fluid levels, battery, cables and connections; change engine oil and filters; replace engine coolant; and/or other operational characteristics as recommended by the manufacturer or supplier). [District Rule 4702]
14. {3807} An emergency situation is an unscheduled electrical power outage caused by sudden and reasonably unforeseen natural disasters or sudden and reasonably unforeseen events beyond the control of the permittee. [District Rule 4702]
15. {3808} This engine shall not be used to produce power for the electrical distribution system, as part of a voluntary utility demand reduction program, or for an interruptible power contract. [District Rule 4702]
16. {3481} This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations. Operation of the engine for maintenance, testing, and required regulatory purposes shall not exceed 50 hours per calendar year. [District Rule 4702 and 17 CCR 93115]
17. {3496} The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.) and records of operational characteristics monitoring. For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule. [District Rule 4702 and 17 CCR 93115]
18. {4262} This engine shall be operated only for testing and maintenance of the engine, required regulatory purposes, and during emergency situations. Operation of the engine for maintenance, testing, and required regulatory purposes shall not exceed 50 hours per calendar year. [District Rule 4702, 17 CCR 93115 and 40 CFR Part 60 Subpart IIII]
19. {4263} The permittee shall maintain monthly records of the type of fuel purchased. [District Rule 4702 and 17 CCR 93115]
20. {3475} All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rule 4702 and 17 CCR 93115]

DRAFT

Permit #: S-382-815-0	Last Updated
Facility: OCCIDENTAL OF ELK HILLS INC	12/20/2011 JONESW

Equipment Pre-Baselined: NO

	<u>NOX</u>	<u>SOX</u>	<u>PM10</u>	<u>CO</u>	<u>VOC</u>
Potential to Emit (lb/Yr):	96.0	0.0	3.0	24.0	41.0
Daily Emis. Limit (lb/Day)	46.1	0.1	1.5	11.5	19.5
Quarterly Net Emissions Change (lb/Qtr)					
Q1:	24.0	0.0	1.0	6.0	10.0
Q2:	24.0	0.0	1.0	6.0	10.0
Q3:	24.0	0.0	1.0	6.0	10.0
Q4:	24.0	0.0	1.0	6.0	10.0
Check if offsets are triggered but exemption applies	N	N	N	N	N
Offset Ratio					
Quarterly Offset Amounts (lb/Qtr)					
Q1:					
Q2:					
Q3:					
Q4:					

Appendix B
BACT Guideline and BACT Analysis

San Joaquin Valley Unified Air Pollution Control District

Best Available Control Technology (BACT) Guideline 3.1.1
Last Update: 7/10/2009
Emergency Diesel IC Engine

Pollutant	Achieved in Practice or in the SIP	Technologically Feasible	Alternate Basic Equipment
CO	Latest EPA Tier Certification level for applicable horsepower range		
NOX	Latest EPA Tier Certification level for applicable horsepower range		
PM10	0.15 g/hp-hr or the Latest EPA Tier Certification level for applicable horsepower range, whichever is more stringent. (ATCM)		
SOX	Very low sulfur diesel fuel (15 ppmw sulfur or less)		
VOC	Latest EPA Tier Certification level for applicable horsepower range		

BACT is the most stringent control technique for the emissions unit and class of source. Control techniques that are not achieved in practice or contained in a state implementation plan must be cost effective as well as feasible. Economic analysis to demonstrate cost effectiveness is required for all determinations that are not achieved in practice or contained in an EPA approved State Implementation Plan.

Top Down BACT Analysis for the Emergency IC Engine

BACT Guideline 3.1.1 (July 10, 2009) applies to emergency diesel IC engines. In accordance with the District BACT policy, information from that guideline will be utilized without further analysis.

1. BACT Analysis for NO_x, VOC, and CO Emissions:

a. Step 1 - Identify all control technologies

BACT Guideline 3.1.1 identifies only the following option:

- *Latest EPA Tier Certification level for applicable horsepower range*

To determine the latest applicable Tier level, the following EPA and state regulations were consulted:

- 40 CFR Part 60 Subpart IIII – Standards of Performance for Stationary Compression Ignition Internal Combustion Engines
- 40 CFR Part 89 – Control of Emissions from New and In-Use Nonroad Compression – Ignition Engines
- 40 CFR Part 1039 – Control of Emissions from New and In-Use Nonroad Compression-Ignition Engines
- Title 17 CCR, Section 93115 - Airborne Toxic Control Measure (ATCM) for Stationary Compression-Ignition (CI) Engines

40 CFR Parts 89 and 1039, which apply only to nonroad engines, do not directly apply because the proposed emergency engine(s) do not meet the definition of a nonroad engine. Therefore, only Title 17 CCR, Section 93115 and 40 CFR Part 60 Subpart IIII apply directly to the proposed emergency engine(s).

Title 17 CCR, Section 93115.6(a)(3)(A) (CARB stationary diesel engine ATCM) applies to emergency standby diesel-fired engines and requires that such engines be certified to the emission levels in Table 1 (below). Please note that these levels are at least as stringent or more stringent than the emission levels in 40 CFR Subpart IIII.

Table 1: Emission Standards for New Stationary Emergency Standby Diesel-Fueled CI Engines g/bhp-hr (g/kW-hr)					
Maximum Engine Power	Tier	Model Year(s)	PM	NMHC+NOx	CO
50 ≤ HP < 75 (37 ≤ kW < 56)	2	2007	0.15 (0.20)	5.6 (7.5) 3.5 (4.7)	3.7 (5.0)
	4i	2008+			
75 ≤ HP < 100 (56 ≤ kW < 75)	2	2007	0.15 (0.20)	5.6 (7.5) 3.5 (4.7)	3.7 (5.0)
	3	2008+			
100 ≤ HP < 175 (75 ≤ kW < 130)	3	2007	0.15 (0.20)	3.0 (4.0)	3.7 (5.0)
		2008+			
175 ≤ HP < 300 (130 ≤ kW < 225)	3	2007	0.15 (0.20)	3.0 (4.0)	2.6 (3.5)
		2008+			
300 ≤ HP < 600 (225 ≤ kW < 450)	3	2007	0.15 (0.20)	3.0 (4.0)	2.6 (3.5)
		2008+			
600 ≤ HP ≤ 750 (450 ≤ kW ≤ 560)	3	2007	0.15 (0.20)	3.0 (4.0)	2.6 (3.5)
		2008+			
HP > 750 (kW > 560)	2	2007	0.15 (0.20)	4.8 (6.4)	2.6 (3.5)
		2008+			

Additionally, 40 CFR Subpart IIII establishes emission standards for emergency diesel IC engines. These emission standards are the same as those specified in the CARB ATCM, except for engines rated greater than or equal to 50 and less than 75 hp. For such IC engines, the CARB ATCM is more stringent.

Therefore, the most stringent applicable emission standards are those listed in the CARB ATCM (Table 1).

For IC engines rated greater than or equal to 50 hp and less than 75 hp the the highest Tier required is Tier 4i. For IC engines rated greater than or equal to 75 hp and less than 750 hp the highest Tier required is Tier 3. For engines rated equal to or greater than 750 hp the highest Tier required is Tier 2.

Also, please note that neither the state ATCM nor the Code of Federal Regulations require the installation of IC engines meeting a higher Tier standard than those listed above for emergency applications, due to concerns regarding the effectiveness of the exhaust emissions controls during periods of short-term operation (such as testing operational readiness of an emergency engine).

The proposed engine(s) is/are rated at 345 hp. Therefore, the applicable control technology option is EPA Tier 3 certification.

b. Step 2 - Eliminate technologically infeasible options

The control option listed in Step 1 is not technologically infeasible.

c. Step 3 - Rank remaining options by control effectiveness

No ranking needs to be done because there is only one control option listed in Step 1.

d. Step 4 - Cost Effectiveness Analysis

The applicant has proposed the only control option remaining under consideration. Therefore, a cost effectiveness analysis is not required.

e. Step 5 - Select BACT

BACT for NO_x, VOC, and CO will be the use of an EPA Tier 3 certified engine. The applicant is proposing such a unit. Therefore, BACT will be satisfied.

Appendix C

Certification of Conformity



**UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
2012 MODEL YEAR
CERTIFICATE OF CONFORMITY
WITH THE CLEAN AIR ACT OF 1990**

**OFFICE OF TRANSPORTATION
AND AIR QUALITY
ANN ARBOR, MICHIGAN 48105**

Certificate Issued To: Cummins Inc.
(U.S. Manufacturer or Importer)
Certificate Number: CCEXL0409AAB-013

Effective Date:
06/21/2011
Expiration Date:
12/31/2012

Karl J. Simon, Director
Compliance and Innovative Strategies Division

Issue Date:
06/21/2011
Revision Date:
N/A

Model Year: 2012
Manufacturer Type: Original Engine Manufacturer
Engine Family: CCEXL0409AAB


Mobile/Stationary Indicator: Stationary
Emissions Power Category: 130<=kW<225
Fuel Type: Diesel
After Treatment Devices: No After Treatment Devices Installed
Non-after Treatment Devices: No Non-After Treatment Devices Installed

Pursuant to Section 111 and Section 213 of the Clean Air Act (42 U.S.C. sections 7411 and 7547) and 40 CFR Part 60, and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following engines, by engine family, more fully described in the documentation required by 40 CFR Part 60 and produced in the stated model year.

This certificate of conformity covers only those new compression-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 60 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 60.

It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 60. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 60.

This certificate does not cover engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.

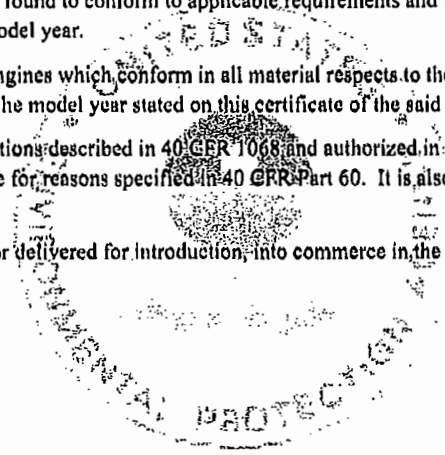

Appendix D
RMR and AAQA Summary

San Joaquin Valley Air Pollution Control District Risk Management Review

To: William Jones, AQE – Permit Services
 From: Joe Aguayo, AQS – Technical Services
 Date: January 23, 2012
 Facility Name: Occidental of Elk Hills
 Location: Light Oil Production
 Sec 35 T30S Range 23E
 Application #(s): S-382-815-0
 Project #: S-1114735

A. RMR SUMMARY

RMR Summary			
Categories	Diesel-Fired IC Engine (Unit 815-0)	Project Totals	Facility Totals
Prioritization Score	N/A ¹	N/A ¹	N/A ¹
Acute Hazard Index	N/A ²	N/A ²	N/A ²
Chronic Hazard Index	N/A ²	N/A ²	N/A ²
Maximum Individual Cancer Risk (10 ⁻⁶)	0.01	0.01	0.02
T-BACT Required?	No		
Special Permit Conditions?	Yes		

- 1 Prioritization for this unit was not conducted since it has been determined that all diesel-fired IC engines will result in a prioritization score greater than 1.0.
- 2 Acute and Chronic Hazard Indices were not calculated since there is no risk factor, or the risk factor is so low that the risk has been determined to be insignificant for this type of unit.

Proposed Permit Conditions

To ensure that human health risks will not exceed District allowable levels; the following permit conditions must be included for:

Unit # 815-0

3. Emissions from this IC engine shall not exceed **0.09** g-PM10/bhp-hr based on USEPA certification using ISO 8178 test procedure. [District Rules 2201 N
4. The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap, roof overhang, or any other obstruction. [District Rule 4102] N
5. ~~This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations.~~ Operation of the engine for maintenance, testing, and required regulatory purposes shall not exceed **50** hours per calendar year. [District Rule 4702 and 17 CCR 93115] N

B. RMR REPORT

I. Project Description

Technical Services received a request on December 13, 2011, to perform an Ambient Air Quality Analysis and a Risk Management Review for a 324 hp diesel-fired emergency IC engine powering an electrical generator.

II. Analysis

Technical Services performed a screening level health risk assessment using the District developed 'Diesel ICE Screen Tool'.

The following parameters were used for the review:

Analysis Parameters Unit 815-0			
Source Type	Point	PM ₁₀ g/hp-hr	0.09
BHP	324	Max Hours per Year	50
Closest Receptor (m)	7420	Type of Receptor	Residential
Quad	2	District	SJVUAPCD
Met Site	Bakersfield	Location Type	Rural
Year	2008		

Technical Services performed modeling for criteria pollutants CO, NO_x, SO_x and PM₁₀; as well as a RMR. The emission rates used for criteria pollutant modeling were 0.5 lb/hr CO, 1.9 lb/hr NO_x, 0.0 lb/hr SO_x, and 0.1 lb/hr PM₁₀. The engineer supplied the maximum fuel rate for the IC engine used during the analysis.

The results from the Criteria Pollutant Modeling are as follows:

Criteria Pollutant Modeling Results*

Diesel ICE	1 Hour	3 Hours	8 Hours.	24 Hours	Annual
CO	NA ¹	X	NA ¹	X	X
NO _x	NA ¹	X	X	X	Pass
SO _x	NA ¹	NA ¹	X	NA ¹	Pass
PM ₁₀	X	X	X	NA ¹	Pass ²
PM _{2.5}	X	X	X	NA ¹	Pass ²

*Results were taken from the attached PSD spreadsheet.

¹The project is an intermittent source as defined in APR-1920. In accordance with APR-1920, compliance with short-term (i.e., 1-hour, 3-hour, 8-hour and 24-hour) standards is not required.

²The criteria pollutants are below EPA's level of significance as found in 40 CFR Part 51.165 (b)(2).

III. Conclusion

II.

The cancer risk associated with the operation of the proposed diesel IC engine is less than 1.0 in a million. In accordance with the District's Risk Management Policy, the project is approved without Toxic Best Available Control Technology (T-BACT).

To ensure that human health risks will not exceed District allowable levels; the permit conditions listed on page 1 of this report must be included for this proposed unit .

These conclusions are based on the data provided by the applicant and the project engineer.

Therefore, this analysis is valid only as long as the proposed data and parameters do not change.

The emissions from the proposed equipment will not cause or contribute significantly to a violation of the State and National AAQS.

IV. Attachments

- A. RMR request from the project engineer
 - B. Additional information from the applicant/project engineer
 - C. Toxic emissions summary
 - D. Prioritization score
 - E. Facility Summary
-

Appendix E

QNEC Calculations

Quarterly Net Emissions Change (QNEC)

The Quarterly Net Emissions Change is used to complete the emission profile screen for the District's PAS database. The QNEC shall be calculated as follows:

$QNEC = PE2 - PE1$, where:

- QNEC = Quarterly Net Emissions Change for each emissions unit, lb/qtr
- PE2 = Post-Project Potential to Emit for each emissions unit, lb/qtr
- PE1 = Pre-Project Potential to Emit for each emissions unit, lb/qtr

Since this is a new unit, $PE1 = 0$ for all pollutants. Thus, $QNEC = PE2$ (lb/qtr).

Using the PE2 (lb/yr) values calculated in Section VII.C.2, Quarterly PE2 is calculated as follows:

$$PE2_{\text{quarterly}} = PE2 \text{ (lb/yr)} \div 4 \text{ quarters/year} = QNEC$$

QNEC		
Pollutant	PE2 Total (lb/yr)	Quarterly PE2 (lb/qtr)
NO _x	96	24.0
SO _x	0	0.0
PM ₁₀	3	0.8
CO	24	6.0
VOC	41	10.3

Appendix F
Statement of Compliance Certification



OCCIDENTAL OF ELK HILLS, INC.
10600 Stockdale Highway, Bakersfield, CA 93311
Telephone 661 412-5000

January 30, 2012

Mr. Leonard Scandura
Permit Services Manager
San Joaquin Valley
Air Pollution Control District-Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725

Subject: Occidental of Elk Hills, Inc. Certification of Compliance

Dear Mr. Scandura:

Rule 2201 section 4.15.2 requires that an owner or operator proposing a federal major modification certify that all major stationary sources owned or operated by such person (or by any entity controlling, controlled by, or under common control with such person) in California are either in compliance or on a schedule for compliance with all applicable emission limitations and standards. This letter certifies compliance for Occidental of Elk Hills, Inc. (OEHI) and its affiliates.

OEHI is an ownership partner with Chevron USA for the Elk Hills Unit, which OEHI operates. OEHI has Notices of Violation outstanding. However, all issues associated with the Notices of Violation have been addressed, and OEHI is otherwise operating in compliance with the local, State, and federal laws, orders, regulations, and standards.

Affiliated companies of OEHI own and/or operate other major stationary sources in California. These major stationary sources are currently in compliance with applicable compliance schedules (if any) and are designed and operated to comply with all applicable laws and regulations.

This certification is made on information and belief and is based upon a review of OEHI and affiliated company major stationary sources in the State of California by employees of OEHI and its affiliates who have responsibility for compliance with environmental requirements. This certification is as of the date of its execution.

Sincerely,

Chad Jones
Manager, Production Operations

cc: Lynne Carrithers, OEHI
Mike Glavin, OEHI