



MAY 0 1 2013

Casey Creamer Farmers Firebaugh Ginning Company PO Box 36 Firebaugh, CA 93622

Re: Notice of Preliminary Decision – Emission Reduction Credits

Facility Number: C-480 Project Number: C-1122341

Dear Mr. Creamer:

Enclosed for your review and comment is the District's analysis of Farmers Firebaugh Ginning Company's application for Emission Reduction Credits (ERCs) resulting from the shutdown of a cotton gin, at 35851 West Bullard, in Firebaugh, CA. The quantity of ERCs proposed for banking is 679 metric tons of CO2e per year.

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. After addressing all comments made during the 30-day public notice comment period, the District intends to the issue the ERCs. Please submit your written comments on this project within the 30-day public comment period, as specified in the enclosed public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Steve Roeder of Permit Services at (661) 392-5615.

Sincęrely,

David Warner

Director of Permit Services

DW:SR/bw

Enclosures

cc: Mike Tollstrup, CARB (w/enclosure) via email

cc: Gerardo C. Rios, EPA (w/enclosure) via email

Seyed Sadredin
Executive Director/Air Pollution Control Officer

NOTICE OF PRELIMINARY DECISION FOR THE PROPOSED ISSUANCE OF EMISSION REDUCTION CREDITS

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Unified Air Pollution Control District solicits public comment on the proposed issuance of Emission Reduction Credits to Farmers Firebaugh Ginning Company for the shutdown of a cotton gin, at 35851 West Bullard, in Firebaugh, CA. The quantity of ERCs proposed for banking is 679 metric tons of CO2e per year.

The analysis of the regulatory basis for this proposed action, Project #C-1122341, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and at any District office. For additional information, please contact the District at (661) 392-5500. Written comments on this project must be submitted by June 6, 2013 to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT, 34946 FLYOVER COURT, BAKERSFIELD, CA 93308.

San Joaquin Valley Air Pollution Control District ERC Application Review - Greenhouse Gases Cotton Gin Shutdown

Facility Name: Farmers Firebaugh Ginning Company Date: April 22, 2013

Mailing Address: PO Box 36 Engineer: Steve Roeder

Firebaugh, CA 93622 Lead Engineer: Leonard Scandura

Contact Person: Casey Creamer

Telephone: (559) 252-0684

Project #: C-1122341

Received: July 19, 2012

Deemed Complete: April 1, 2013

ERC #: C-1214-24

I. Summary

The primary business of this facility is cotton ginning. Farmers Firebaugh Ginning Company has surrendered the Permit to Operate (PTO) for their cotton gin (C-480-1-5) following the permanent shutdown after the 2007 ginning season. The facility had submitted an application to bank the emission reduction credits (ERCs) for the actual emission reductions (AER) of the criteria pollutants on 3/5/08 (ERC Project C-1080708).

Subsequently, the facility has submitted this application to bank the Greenhouse Gas (GHG) AER that also resulted for the shutdown of their gin. See the surrendered (PTO) in Appendix A.

Selection of Geographical Boundary for Determining Permanence of the GHG Emission Reduction

Rule 2301 contains several eligibility criteria for emission reduction credit banking, including that the emission reduction must be permanent. When determining the geographical boundary in which the emission reduction is determined to be permanent, the applicant may consider how the GHG ERC may likely be used.

Please note that the while Rule 2301 allows facilities to receive ERCs for GHG emission reductions, the District does not have any requirements on the use of GHG ERCs. However, it is anticipated that the likely uses of such GHG ERCs would be their future retirement as GHG mitigation in the California Environmental Quality Act (CEQA) process.

Pursuant to CEQA, lead agencies must consider the environmental impact of GHG emissions from a project and may require that such GHG emissions be mitigated. In evaluating various mitigation techniques, including the retirement of GHG ERCs, the lead agency must determine if the proposed mitigation technique adequately mitigates the projects GHG emission increase.

When a lead agency determines if the retirement of a particular GHG ERC provides adequate GHG mitigation for a project, the lead agency may choose to consider the location where the GHG ERC was generated and the geographical boundary used to determine the permanence of the emission reduction. In making this determination, the lead agency may conclude that the retirement of a particular GHG ERC would provide adequate mitigation for projects within that same geographical boundary. Again, that determination will be made be the lead agency for any particular project.

For this application, the facility has selected California as the geographical boundary for which the emission reduction is permanent. Information has been provided to validate this geographical boundary selection. Using this geographical boundary, it was determined that the GHG emission reduction is permanent within California.

The following AER qualify for ERC banking.

| GHG ERCs | | | |
|-----------------|-------------------|----------------------|--|
| ERC Certificate | Pollutant | Amount | |
| C-1214-24 | CO ₂ e | 679 metric tons/year | |

II. Applicable Rules

Rule 2301 Emission Reduction Credit Banking (1/19/12)

III. Location of Reduction

The equipment was located at 35851 West Bullard, in Firebaugh, CA.

IV. Method of Generating Reductions

The emission reductions were generated by the shutdown of a permitted cotton ginning operation. The GHG were emitted from the cotton drying equipment which was fired on natural gas.

Equipment Description

C-480-1-5:

COTTON GIN WITH FOUR LUMMUS SAW GIN STANDS, EIGHT LINT CLEANERS, ONE CONDENSER, MOTE SYSTEM, TRASH SYSTEM, ONE 6 MMBTU/HR NATURAL GAS-FIRED BURNERS, AND TWO 5 MMBTU/HR NATURAL GAS-FIRED BURNERS SERVED BY TWENTY-FOUR 1D-3D CYCLONE COLLECTORS

V. Calculations

A. Assumptions and Emission Factors

Assumptions

- Units of GHG AER is metric tons of CO₂e per year, rounded to the nearest metric ton
- 1,000 kg = 1 metric ton
- 1 therm of Natural Gas = 100 scf
- The final CO₂e emission factor from the combustion of natural gas includes GHG emissions of CO₂, CH₄ and N₂O, where the total emission factor includes the summation of each of the compounds multiplied by their Global Warming Potential (GWP)
- The emission factors are from the District's Spreadsheet: ARB GHG Emission Factors

Emission Factors (EF)

The emission factors, global warming potential, and CO_2 equivalent emission factors for CO_2 , CH_4 , and N_2O are shown in the following table.

| Natural Gas Emission Factors | | | | | |
|------------------------------|----------|-----------------|-------|---------|----------------|
| Pollutant | kg/MMBtu | 0.1 MMBtu/therm | GWP | CO2e EF | |
| CO ₂ | 52.87 | 0.1 | 1.00 | 5.287 | kg-CO₂e /therm |
| CH₄ | 0.0009 | 0.1 | 21.00 | 0.0019 | kg-CO₂e /therm |
| N2O | 0.0001 | 0.1 | 310.0 | 0.0031 | kg-CO₂e /therm |
| CO ₂ e | | | | 5.292 | kg-CO₂e /therm |

The CO₂e emission factor is converted into metric tons/therm as follows:

$$\frac{5.292 \ kg \cdot CO_2 e}{therm} x \ \frac{1 \ metric \ ton}{1,000 \ kg} = 0.00529 \frac{metric \ tons \cdot CO_2 e}{therm}$$

B. Baseline Period Determination

Pursuant to Rule 2301, Section 3.6, the Baseline Period is the same as defined in Rule 2201, which is:

The two consecutive years of operation immediately prior to the submission date of the complete application; or at least two consecutive years within the five years immediately prior to the submission date of the complete application if determined by the APCO as more representative of normal source operation.

The original ERC Banking Project C-480, 1080708 specified the baseline period as the operating years 2004 and 2005. Since the District has already established this as the correct baseline period for the criteria pollutant emission reductions that have already been evaluated and issued, the same baseline period is used for this evaluation.

Therefore the Baseline Period is the operating years of 2004 and 2005.

C. Baseline Data

The baseline natural gas-use is taken from the annual fuel-use records that have been supplied by the applicant, as evaluated in ERC project C-1080708. The fuel use includes the total fuel use from the 4th quarter of 2004 and the 1st quarter of 2005, and the one-year total is posted in the following table.

| Baseline Fuel Usage | | |
|---------------------|--------------------------|--|
| Year | Annual Fuel Use (Therms) | |
| 2004 - 05 Season | 128,363 | |

D. Historical Actual Emissions (HAE)

The HAE from the fuel use is determined by multiplying the annual fuel-use by the emission factor presented above.

| CO₂e HAE | | | | | | |
|-----------|---------|---------------------|---------|-------------|-----|----------------|
| 2004 - 05 | 0.00529 | metric tons/therm x | 128,363 | therms/yr = | 679 | metric tons/yr |

E. Post Project Potential to Emit (PE2)

As discussed above, the subject equipment has been permanently shut down and its PTO was surrendered. Therefore the PE2 is 0.

F. Emission Reductions Eligible for Banking

The emission reductions eligible for banking are the difference between the historical actual emissions and the potential to emit after the project.

ERCs eligible for banking = 679 metric ton/year – 0 ton/year = 679 metric ton/year

VI. Compliance

Rule 2301 – Emission Reduction Credit Banking

Regarding GHG, the purpose of this Rule is to:

- 1.2.1 Provide an administrative mechanism for sources to bank voluntary greenhouse gas emission reductions for later use.
- 1.2.2 Provide an administrative mechanism for sources to transfer banked greenhouse gas emission reductions to others for any use.
- 1.2.3 Define eligibility standards, quantitative procedures and administrative practices to ensure that banked greenhouse gas emission reductions are real, permanent, quantifiable, surplus, and enforceable.

Section 4.5 specifies eligibility criteria for GHG emission reductions to qualify for banking. Below is a summary of each criteria and a description of how the emission reductions satisfy the criteria.

Section 4.5.1 requires that the emission reduction must have occurred after 1/1/05.

The emission reductions occurred when the PTO was surrendered on 1/1/06. As the emission reduction occurred after 1/1/05, this criteria has been satisfied.

Section 4.5.2 requires that the emissions must have occurred in the District.

The emissions occurred at 35851 West Bullard, in Firebauge, CA. Since this location is within the District, this criteria has been satisfied.

Section 4.5.3 requires that the emission reductions must be real, surplus, permanent, quantifiable, and enforceable.

Real:

The GHG emission reductions were generated by the shutdown of a cotton gin. The real emissions were calculated from actual historic fuel-use data and recognized emission factors. The cotton gin has been removed. Therefore, the emission reductions are real.

Surplus:

The facility is not subject to the CARB cap and trade regulation, and the emission reductions occurred prior to 1/1/12. Therefore, the emission reductions satisfy the surplus requirement in Section 4.5.3.1.

There are no laws, rules, regulations, agreements, orders, or permits requiring any GHG emission reductions from cotton gins. Therefore, the emission reductions satisfy the surplus requirement in Section 4.5.3.2.

The emission reductions are not the result of an action taken by the permittee to comply with any requirement. The emission reductions are surplus and additional of all requirements. Therefore, the emission reductions satisfy the surplus requirement in section 4.5.3.4.

The Certificates will be identified according to Section 6.15.3 below.

Permanent:

The cotton gin has been shut down, removed, and the PTO has been surrendered.

When determining the geographical boundary in which the emission reduction is determined to be permanent the applicant may consider how the GHG ERC may likely be used.


Please note that the while Rule 2301 allows facilities to receive ERCs for GHG emission reductions, the District does not have any requirements on the use of GHG ERCs. However, it is anticipated that the likely uses of such GHG ERCs would be their future retirement as GHG mitigation in the CEQA process.

Pursuant to CEQA, lead agencies must consider the environmental impact of GHG emissions from a project and may require that such GHG emissions be mitigated. In evaluating various mitigation techniques, including the retirement of GHG ERCs, the lead agency must determine if the proposed mitigation technique adequately mitigates the projects GHG emission increase.

When a lead agency determines if the retirement of a particular GHG ERC provides adequate GHG mitigation for a project, the lead agency may choose to consider the location where the GHG ERC was generated and the geographical boundary used to determine the permanence of the emission reduction. The in making this determination, the lead agency may conclude that the retirement of a particular GHG ERC would provide adequate mitigation for projects within that same geographical boundary. Again, that determination will be made be the lead agency for a particular project.

This facility has selected California as the geographical boundary for which the emission reduction is permanent. Information has been provided below to validate this geographical boundary selection.

As shown in the following chart, the total cotton acreage has been on a decline since January of 2005. Acreage has declined from 667,000 acres in 2005 down to 190,065 acres in 2009. The decline in acreage forced the closure of several cotton gins in California.

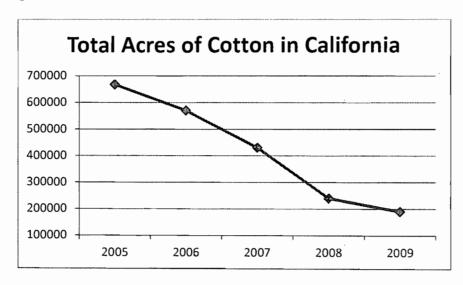

Because there has been a decrease in the amount of cotton being grown in the state of California, the need to gin cotton in California has decreased accordingly.

Based on this information, the geographical boundary for which the emission reduction is permanent within California.

The ERC will include the following identifier:

"Shutdown of cotton gin verified as permanent within the State of California"

Quantifiable:

The actual emissions were calculated from historic fuel-use records and accepted emission factors. Therefore, the emission reductions are quantifiable and have been quantified.

Enforceable:

The cotton gin has been shut down and the PTO has been surrendered to the District. Operation of the equipment without a valid permit would subject the permittee to enforcement action. Therefore, the emission reductions are enforceable.

Section 4.5.4 requires that GHG emission reductions be calculated as the difference between the historic annual average GHG emissions (as CO₂e) and the PE2 after the reduction is complete. The historical GHG emissions must be calculated using the consecutive 24 month period immediately prior to the date the emission reductions occurred (the shutdown of the cotton gin), or another consecutive 24 month period in the 60 months prior to the date the emission reduction occurred if determined by the APCO as being more representative of normal operations.

The GHG emission reductions were calculated according to the baseline period identified above. Since this is a permanent shutdown of the cotton gin, with none of the load being shifted to any other gin in California, there is no post-project potential to emit GHG.

Section 4.5.5.5 requires that GHG emission reductions proposed to be quantified using CARB-approved emission reduction project protocols shall be calculated in accordance with the applicable protocol.

Since the GHG emission reductions are not subject to an applicable CARB-approved emission reduction project protocol, this section is not applicable.

Section 4.5.6 requires that ERCs shall be made enforceable through permit conditions or legally binding contract.

The cotton gin held a legal District operating permit. That permit has been surrendered to the District. Since the operation of the cotton gin would require a new Authority to Construct, as discussed above the emission reduction is enforceable.

Section 5 identifies ERC Certificate application procedures.

Section 5.5.2 requires, for emission reductions occurring prior to 1/19/12, applications for ERCs must be submitted by 7/19/12.

The ERC application was submitted on 7/19/12, therefore the application is timely.

Section 6.15 specifies the registration requirements for GHG ERCs.

This emission reductions are surplus and additional of all requirements pursuant to Section 4.5.3.4. Therefore the ERC certificate shall include the following notation:

"This emission reduction is surplus and additional to all applicable regulatory requirements."

Compliance with Rule 2301 has been demonstrated and no adjustments are required under this Rule.

VII. Recommendation

Issue the ERC Certificate in the amount posted in the table below and on the Draft ERC Certificate in Appendix B.

| GHG ERCs | | | |
|-----------------|-------------------|----------------------|--|
| ERC Certificate | Pollutant | Amount | |
| C-1214-24 | CO ₂ e | 679 metric tons/year | |

List of Appendixes

- A. Surrendered PTO
- B. Draft Emission Reduction Credit Certificate

Appendix A Surrendered PTO

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-480-1-5

EXPIRATION DATE: 08/31/2012

EQUIPMENT DESCRIPTION:

COTTON GIN WITH FOUR LUMMUS SAW GIN STANDS, EIGHT LINT CLEANERS, ONE CONDENSER, MOTE SYSTEM, TRASH SYSTEM, ONE 6 MMBTU/HR NATURAL GAS-FIRED BURNERS, AND TWO 5 MMBTU/HR NATURAL GAS-FIRED BURNERS SERVED BY TWENTY-FOUR 1D-3D CYCLONE COLLECTORS

PERMIT UNIT REQUIREMENTS

- 1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
- 2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]
- 3. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201]
- 4. All equipment shall be maintained in good operating condition and shall be operated in a manner to minimize emissions of air contaminants into the atmosphere [District Rule 2201]
- 5. Material removed from dust collector(s) shall be disposed of in a manner preventing entrainment into the atmosphere. [District Rule 2201]
- 6. The trash auger of the trash piling system shall have both sides equipped with wind barriers that extend, as measured vertically prior to trash pile build-up, one foot above and three feet below the auger. [District Rule 4204]
- 7. After the trash pile has built up to the height of the trash auger, removing material from the pile shall be performed in such a way as to prevent free-falling trash from the stockpiling system. [District Rule 4204]
- 8. If the trash stockpile is removed to prevent the build-up of heat in the pile, the operator shall record the date of the removal. [District Rule 4204]
- 9. Daily ginning throughput of the saw-type cotton gin shall not exceed 236 tons of baled cotton per day (944 bales per day, based on 500 pound-bales). [District Rule 2201]
- 10. Annual ginning throughput of the saw-type cotton gin shall not exceed 32,243 tons of baled cotton per year (128,972 bales per year, based on 500-pound bales). [District Rule 2201]
- 11. Total emissions from the cotton gin operation shall not exceed 3.32 lb-PM10/ton of baled cotton (0.83 lb-PM10/bale, corrected to 500 pound-bales). [District Rule 2201]
- 12. Daily emissions from the cotton ginning operation shall not exceed 783.5 lb-PM10/day. [District Rule 2201]
- 13. Emissions from the cyclone system serving the unloading system shall not exceed 0.440 lb-PM10/ton of baled cotton (0.110 lb-PM10/bale, based on 500 pound-bales). [District Rule 2201]
- 14. Emissions from the cyclone system serving the #1 dryer and cleaner system shall not exceed 0.440 lb-PM10/ton of baled cotton (0.110 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 15. Emissions from the cyclone system serving the #2 dryer and cleaner system shall not exceed 0.360 lb-PM10/ton of baled cotton (0.090 lb-PM10/bale, based on 500-pound bales). [District Rule 22011
- 16. Emissions from the cyclone system serving the overflow and feeder dust system shall not exceed 0.200 lb-PM10/ton of baled cotton (0.050 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: FARMERS FIREBAUGH GINNING CO. Location: 35851 W BULLARD, FIREBAUGH, CA 93622 C480-1-5 - Aug 10 2007 R49AM - AGUAYO)

3 4 5 7 8 3

National dis

- 17. Emissions from the cyclone system serving the gin stand and feeder trash system shall not exceed 0.160 lb-PM10/ton of baled cotton (0.040 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 18. Emissions from the cyclone system serving the #1 & 2 lint cleaner condensers system shall not exceed 0.280 lb-PM10/ton of baled cotton (0.070 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 19. Emissions from the cyclone system serving motes "A" and "B" system shall not exceed 0.280 lb-PM10/ton of baled cotton (0.070 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 20. Emissions from the cyclone system serving the battery condenser system shall not exceed 0.160 lb-PM10/ton of baled cotton (0.040 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 21. Emissions from the cyclone system serving the robber system shall not exceed 0.280 lb-PM10/ton of baled cotton (0.070 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 22. Emissions from the cyclone system serving the stockpiler and mote trash system shall not exceed 0.72 lb-PM10/ton of baled cotton (0.180 lb-PM10/bale, based on 500-pound bales). [District Rule 2201]
- 23. Emission rates from the natural gas-fired burners shall not exceed any of the following limits: 0.100 lb-NOx/MMBtu, 0.00285 lb-SOx/MMBtu, 0.084 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu, [District Rule 2201]
- 24. The unloading system shall be served by one 72-inch 1D-3D cyclone collector, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 25. The #1 dryer and cleaner system shall be served by two 60-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 26. The #2 dryer and cleaner system shall be served by two 60-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 (1/min, [District Rule 2201]
- 27. The overflow and feeder dust system shall be served by one 60-inch 1D-3D cyclone collector, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 28. The gin stand and feeder trash system shall be served by one 44-inch 1D-3D cyclone collector, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 29. The #1 and #2 lint cleaner condensers system shall be served by eight 58-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 30. The mote "A" and "B" system shall be served by two 68-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 31. The battery condenser system shall be served by three 64-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 32. The robber system shall be served by one 72-inch 1D-3D cyclone collector, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 33. The stockpiler and mote trash system shall be served by two 50-inch 1D-3D cyclone collectors, operating at a cyclone inlet air velocity of 3200 ± 400 ft/min. [District Rule 2201]
- 34. Permittee shall conduct daily visual inspections of the material handling systems for leaks, breaks, or other visible signs of equipment malfunctions. [District Rule 4204]
- 35. Permittee shall maintain a record of the daily inspections of the material handling systems, including any equipment malfunctions discovered and corrective action taken to repair the malfunction, and any source test results. [District Rule 4204]
- 36. Daily and annual records of cotton bales processed shall be maintained, retained on-site for a minimum of five years and shall be made available for District inspection upon request. [District Rule 2201]
- 37. All records shall be retained on site for five years and made available to the District upon request. [District Rules 1070 and 4204]

Appendix B Draft ERC Certificate

San Joaquin Valley Air Pollution Control District

Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726

Emission Reduction Credit Certificate C-1214-24

ISSUED TO:

FARMERS FIREBAUGH GINNING CO.

ISSUED DATE:

<DRAFT>

LOCATION OF

35851 W BULLARD

REDUCTION:

FIREBAUGH, CA 93622

For CO2e Reduction In The Amount Of:

679 metric tons / year

Method Of Reduction

[X] Shutdown of Entire Stationary Source

[] Shutdown of Emissions Units

[] Other

Shutdown of cotton gin verified as permanent within the State of California

Emission Reduction Qualification Criteria

This emission reduction is surplus and additional to all applicable regulatory requirements.

Seyed Sadredin, Executive Director/APCO

David Warner, Director of Permit Services