



# San Joaquin Valley

AIR POLLUTION CONTROL DISTRICT



DEC 24 2014

Mr. Shamim Reza  
Berry Petroleum Company  
5201 Truxtun Ave  
Bakersfield, CA 93309

**Re: Final - Authority to Construct / Certificate of Conformity (Significant Mod)**  
**District Facility # S-1246**  
**Project # 1143823**

Dear Mr. Reza:

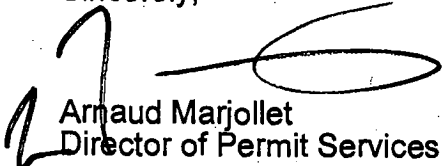
The Air Pollution Control Officer has issued an Authority to Construct (S-1246-401-0) with a Certificate of Conformity to Berry Petroleum Company at western Kern County. The project authorizes one new steam generator. Enclosed is the Authority to Construct (ATC) and a copy of the notice of final action to be published approximately three days from the date of this letter.

Notice of the District's preliminary decision to issue the Authority to Construct permit was published on November 11, 2014. The District's analysis of the proposal was also sent to CARB and US EPA Region IX on November 6, 2014. No comments were received following the District's preliminary decision on this project.

Prior to operating with modifications authorized by the Authority to Construct, you must submit an application to modify the Title V permit as an administrative amendment in accordance with District Rule 2520, Section 11.5.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Leonard Scandura, Permit Services Manager, at (661) 392-5500.

Sincerely,

  
Arnaud Marjollet  
Director of Permit Services

AM:RE/st

Enclosures

cc: Mike Tollstrup, CARB (w/enclosure) via email  
cc: Gerardo C. Rios, EPA (w/enclosure) via email

**Sayed Sadredin**  
Executive Director/Air Pollution Control Officer

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585



**San Joaquin Valley**  
AIR POLLUTION CONTROL DISTRICT



## AUTHORITY TO CONSTRUCT

PERMIT NO: S-1246-401-0

ISSUANCE DATE: 12/15/2014

LEGAL OWNER OR OPERATOR: BERRY PETROLEUM COMPANY, LLC  
MAILING ADDRESS: HEAVY OIL WESTERN STATIONARY SOURCE  
KERN COUNTY, CA

LOCATION: HEAVY OIL WESTERN STATIONARY SOURCE  
KERN COUNTY, CA

SECTION: 2 TOWNSHIP: 31S RANGE: 22E

### EQUIPMENT DESCRIPTION:

85.0 MMBTU/HR PCL NATURAL GAS, ETHANE-RICH NATURAL GAS, AND TEOR GAS-FIRED STEAM GENERATOR WITH NORTH AMERICAN MODEL LE ULTRA LOW-NOX BURNER, FLUE GAS RECIRCULATION (FGR) SYSTEM, AND O2 CONTROLLER

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Prior to operating equipment under this Authority to Construct, permittee shall surrender NOX emission reduction credits for the following quantity of emissions: 1st quarter - 2234 lb, 2nd quarter - 2234 lb, 3rd quarter - 2234 lb, and fourth quarter - 2234 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit
4. Prior to operating equipment under this Authority to Construct, permittee shall surrender SOX emission reduction credits for the following quantity of emissions: 1st quarter - 1396 lb, 2nd quarter - 1396 lb, 3rd quarter - 1396 lb, and fourth quarter - 1396 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

Renaud Marjollet, Director of Permit Services

S-1246-401-0 : Dec 18 2014 9:07AM - EDGEHILL : Joint Inspection NOT Required

5. Prior to operating equipment under this Authority to Construct, permittee shall surrender PM10 emission reduction credits for the following quantity of emissions: 1st quarter - 1536 lb, 2nd quarter - 1536 lb, 3rd quarter - 1536 lb, and fourth quarter - 1536 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Prior to operating equipment under this Authority to Construct, permittee shall surrender VOC emission reduction credits for the following quantity of emissions: 1st quarter - 1536 lb, 2nd quarter - 1536 lb, 3rd quarter - 1536 lb, and fourth quarter - 1536 lb. These amounts include the applicable offset ratio specified in Rule 2201 Section 4.8 (as amended 4/21/11) for the ERC specified below. [District Rule 2201] Federally Enforceable Through Title V Permit
7. ERC Certificate Numbers S-4206-1, S-4205-2, N-1189-4, and S-4210-5 (or certificates split from these certificates) shall be used to supply the required offsets, unless a revised offsetting proposal is received and approved by the District, upon which this Authority to Construct shall be reissued, administratively specifying the new offsetting proposal. Original public noticing requirements, if any, shall be duplicated prior to reissuance of this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
8. The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap (flapper ok), roof overhang, or any other obstruction. [District Rule 4102]
9. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
10. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101] Federally Enforceable Through Title V Permit
11. All equipment shall be maintained in good operating condition and shall be operated in a manner to minimize emissions of air contaminants into the atmosphere. [District Rule 2201] Federally Enforceable Through Title V Permit
12. This unit shall be fired on PUC quality natural gas, but not solely PUC quality natural gas; or gaseous fuel treated to remove 95% by weight of sulfur compounds, or gaseous fuel treated such that the sulfur content of all fuel streams combined does not exceed 1 gr of sulfur compounds (as S) per 100 dscf. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The unit shall only be fired on natural/TEOR/ethane-rich gas with a maximum sulfur content of 1.75 gr S/100scf. [District Rules 2201, 4301, and 4320] Federally Enforceable Through Title V Permit
14. At least quarterly, the permittee shall monitor using the methods specified in this permit the higher heating value of each non-certified fuel supplied to this unit, or, alternatively, have the higher heating value certified by the fuel supplier. The records of higher heating value and quantity of fuel combusted shall be used to demonstrate that the rated heat input capacity of this unit, as averaged over a calendar quarter, is not exceeded. [District Rules 2201] Federally Enforceable Through Title V Permit
15. The higher heating value of each non-certified fuel shall be certified by a third party fuel supplier or determined by ASTM D1826 or D1945 in conjunction with ASTM D 3588. [District Rules 2201 and 4320] Federally Enforceable Through Title V Permit
16. Except for periods of startup and shutdown, emissions from the natural gas-fired unit shall not exceed any of the following limits: 7 ppmvd NOx @ 3% O2 or 0.008 lb-NOx/MMBtu, 0.0055 lb-PM10/MMBtu, 25 ppmvd CO @ 3% O2 or 0.0185 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4201, 4301, 4305, 4306, 4320, and 4801] Federally Enforceable Through Title V Permit
17. Duration of start-up or shutdown shall not exceed two hours each per occurrence. During start-up or shutdown, the emissions control system shall be in operation, and emissions shall be minimized insofar as technologically possible. The operator shall maintain daily records of the duration of start-up and shutdown periods. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
18. Start-up is defined as the period of time during which a unit is brought from a shutdown status to its operating temperature and pressure, including the time required by the unit's emission control system to reach full operation. Shutdown is defined as the period of time during which a unit is taken from an operational to a non-operational status by allowing it to cool down from its operating temperature to ambient temperature as the fuel supply to the unit is completely turned off. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

19. Source testing to measure natural gas-combustion NO<sub>x</sub> and CO emissions from this unit shall be conducted within 60 days of initial startup and at least once every twelve (12) months thereafter. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 2201, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
20. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
21. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
22. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
23. NO<sub>x</sub> emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
24. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
25. Stack gas oxygen (O<sub>2</sub>) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
26. Fuel sulfur content shall be determined using EPA Method 11 or Method 15. [District Rule 4320] Federally Enforceable Through Title V Permit
27. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
28. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
29. The permittee shall monitor and record the stack concentration of NO<sub>x</sub>, CO, and O<sub>2</sub> at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
30. If either the NO<sub>x</sub> or CO concentrations corrected to 3% O<sub>2</sub>, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of the performing the notification and testing required by this condition. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

31. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
32. If the steam generator is not fired on PUC-regulated natural gas and compliance is achieved through fuel sulfur content limitations, then the sulfur content of the fuel shall be determined by testing sulfur content at a location after all fuel sources are combined prior to incineration, or by performing mass balance calculations based on monitoring the sulfur content and volume of each fuel source. The sulfur content of the fuel shall be determined using the test methods referenced in this permit. [District Rule 4320] Federally Enforceable Through Title V Permit
33. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, permittee shall demonstrate compliance at least annually. [District Rule 4320] Federally Enforceable Through Title V Permit
34. If the unit is fired on PUC-regulated natural gas, valid purchase contracts, supplier certifications, tariff sheets, or transportation contracts may be used to satisfy the fuel sulfur content analysis, provided they establish the fuel sulfur concentration and higher heating value. [District Rule 4320] Federally Enforceable Through Title V Permit
35. The permittee shall maintain records of: (1) the date and time of NO<sub>x</sub>, CO, and O<sub>2</sub> measurements, (2) the O<sub>2</sub> concentration in percent and the measured NO<sub>x</sub> and CO concentrations corrected to 3% O<sub>2</sub>, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305, 4306, and 4320] Federally Enforceable Through Title V Permit
36. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070, 4305, 4306, and 4320] Federally Enforceable Through Title V Permit