



NOV 26 2012

Mr. Mathew Towers  
O'Neill Beverages Co. LLC  
8418 S. Lac Jac Avenue  
Parlier, CA 93654

**Re: Final - Authority to Construct / Certificate of Conformity (Significant Mod)  
District Facility # C-629  
Project # C-1112898**

Dear Mr. Towers:

The Air Pollution Control Officer has issued Authorities to Construct (C-629-289-6 through -302-6, -303-5 through -320-5, -325-3 through -332-3, -333-4 through -378-4, -379-3, -380-3, -381-4, and -382-4) with Certificates of Conformity to O'Neill Beverages Co. LLC located at 8418 S. Lac Jac in Parlier. The modification will consist of replacing the conditions requiring monthly updates of the annual VOC emission calculation with new District and EPA approved conditions requiring a rolling twelve month calculation.

Enclosed are the Authorities to Construct. The application and proposal were sent to US EPA Region IX on March 2, 2012. All comments received have been addressed by the District. A summary of the comments and the District's response to each comment is included as an attachment to the engineering evaluation.

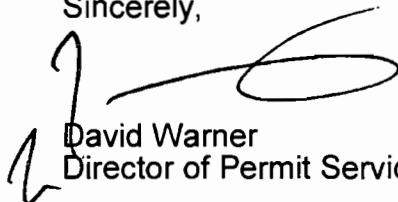
The notice of final decision for this project will be published approximately three days from the date of this letter.

Prior to operating with modifications authorized by the Authority to Construct, you must submit an application to modify the Title V permit as an administrative amendment in accordance with District Rule 2520, Section 11.5.

Enclosed is an invoice for the engineering evaluation fees. Please remit the amount owed, along with a copy of the attached invoice, within 30 days.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,



David Warner  
Director of Permit Services

Enclosures  
df

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585



NOV 26 2012

Gerardo C. Rios, Chief  
Permits Office  
Air Division  
U.S. EPA - Region IX  
75 Hawthorne St  
San Francisco, CA 94105

**Re: Final - Authority to Construct / Certificate of Conformity (Significant Mod)  
District Facility # C-629  
Project # C-1112898**

Dear Mr. Rios:


The Air Pollution Control Officer has issued Authorities to Construct (C-629-289-6 through -302-6, -303-5 through -320-5, -325-3 through -332-3, -333-4 through -378-4, -379-3, -380-3, -381-4, and -382-4) with Certificates of Conformity to O'Neill Beverages Co. LLC located at 8418 S. Lac Jac in Parlier. The modification will consist of replacing the conditions requiring monthly updates of the annual VOC emission calculation with new District and EPA approved conditions requiring a rolling twelve month calculation.

Enclosed is a copy of the Authorities to Construct. The application and proposal were sent to US EPA Region IX on March 2, 2012. All comments received have been addressed by the District. A summary of the comments and the District's response to each comment is included as an attachment to the engineering evaluation.

The notice of final decision for this project will be published approximately three days from the date of this letter.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,



David Warner  
Director of Permit Services

Enclosures  
df

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585



NOV 26 2012

Mike Tollstrup, Chief  
Project Assessment Branch  
Air Resources Board  
P O Box 2815  
Sacramento, CA 95812-2815

**Re: Final - Authority to Construct / Certificate of Conformity (Significant Mod)  
District Facility # C-629  
Project # C-1112898**

Dear Mr. Tollstrup:

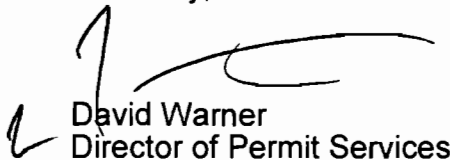
The Air Pollution Control Officer has issued Authorities to Construct (C-629-289-6 through -302-6, -303-5 through -320-5, -325-3 through -332-3, -333-4 through -378-4, -379-3, -380-3, -381-4, and -382-4) with Certificates of Conformity to O'Neill Beverages Co. LLC located at 8418 S. Lac Jac in Parlier. The modification will consist of replacing the conditions requiring monthly updates of the annual VOC emission calculation with new District and EPA approved conditions requiring a rolling twelve month calculation.

Enclosed is a copy of the Authorities to Construct. The application and proposal were sent to US EPA Region IX on March 2, 2012. All comments received have been addressed by the District. A summary of the comments and the District's response to each comment is included as an attachment to the engineering evaluation.

The notice of final decision for this project will be published approximately three days from the date of this letter.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

  
David Warner  
Director of Permit Services

Enclosures  
df

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585

**NOTICE OF FINAL DECISION  
FOR THE ISSUANCE OF AUTHORITY TO CONSTRUCT AND  
THE PROPOSED SIGNIFICANT MODIFICATION OF FEDERALLY  
MANDATED OPERATING PERMIT**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Air Pollution Control District has made its final decision to issue Authorities to Construct to O'Neill Beverages Co. LLC for wine and brandy production facility located at located at 8418 S. Lac Jac in Parlier, California. The modification will consist of replacing the conditions requiring monthly updates of the annual VOC emission calculation with new District and EPA approved conditions requiring a rolling twelve month calculation.

The District's analysis of the legal and factual basis for this proposed action, project #C-1112898, is available for public inspection at the District office at the address below. For additional information regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900, or contact David Warner, Director of Permit Services, in writing at SAN JOAQUIN VALLEY AIR POLLUTION CONTROL DISTRICT, 1990 E. GETTYSBURG AVE, FRESNO, CA 93726-0244.



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-289-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 195,216 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 306) WITH PRESSURE VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-289-6: Nov 18 2012 9:23AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-290-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 307) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-290-6 Nov 19 2012 9:23AM - FUKUDAD Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-291-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 308) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-291-6 : Nov 19 2012 9:23AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

PERMIT NO: C-629-292-6

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC

MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

### EQUIPMENT DESCRIPTION:

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 309) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-293-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 310) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-293-6 Nov 19 2012 9:23AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-294-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 311) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-294-6; Nov 19 2012 9:23AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-295-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 312) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-295-6 : Nov 19 2012 9:23AM - FLKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-296-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 313) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-296-6 Nov 19 2012 9:23AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

PERMIT NO: C-629-297-6

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC

MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

### EQUIPMENT DESCRIPTION:

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 314) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-297-6 Nov 19 2012 9:23AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-298-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 315) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-298-6 Nov 19 2012 9:23AM - FUKUOAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-299-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 316) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-299-6 · Nov 19 2012 9:23AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-300-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 317) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-300-6 Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-301-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 318) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-301-6, Nov 19 2012 9:24AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-302-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 319) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-302-6 Nov 19 2012 9:24AM - FLKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-303-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2017) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-303-5, Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-304-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2018) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-304-5: Nov 19 2012 9:24AM - FLKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-305-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2019) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-305-5 Nov 19 2012 9:24AM - FUKUDAD . Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

PERMIT NO: C-629-306-5

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

### EQUIPMENT DESCRIPTION:

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2020) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-306-5, Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-307-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2001) WITH PRESSURE/VACUUM VALVE AND INSULATION; REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-307-5 : Nov 19 2012 9:24AM - FUKUODAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-308-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2002) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-308-5; Nov 19 2012 9:24AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-309-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2003) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-309-5, Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-310-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2004) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-310-5; Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-311-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2005) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-311-5; Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-312-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2012) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-312-5 : Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-313-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2013) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-314-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2014) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

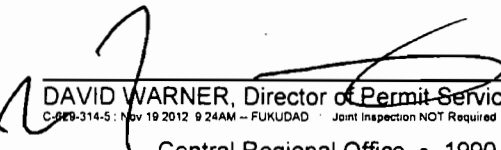
### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-314-5; Nov 19 2012 9:24AM -- FUKUDAD Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-315-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2015) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-315-5 Nov 19 2012 9:24AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-316-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2016) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-316-5: Nov 19 2012 9:24AM - FLKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-317-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2023) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-317-5; Nov 19 2012 9:24AM -- FUKUDAD . Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-318-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2024) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-318-5; Nov 19 2012 9 24AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-319-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2025) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-319-5, Nov 19 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-320-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2026) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-320-5; Nov 19 2012 9:24AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-325-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2027) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-325-3, Nov 9 2012 9:24AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-326-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R2028) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-326-3; Nov 19 2012 9:24AM - FUKUDAD : Joint Permit NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-327-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2029) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-327-3 Nov 19 2012 9:24AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-328-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2030) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-328-3 Nov 19 2012 9:24AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-329-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2031) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-329-3 Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-330-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2032) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-330-3 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-331-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**  
MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2033) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
\_\_\_\_\_  
DAVID WARNER, Director of Permit Services  
C-629-331-3 Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-332-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2034) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-332-3; Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-333-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0290) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-333-4 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-334-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0291) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-334-4, Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-335-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0292) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-335-4 - Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-336-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0293) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-336-4 : Nov 9 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-337-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0294) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-337-4, Nov 19 2012 9:25AM - FUKUDAO Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-338-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0295) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services.

C-629-338-4 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-339-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0622) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-339-4: Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-340-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0623) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-340-4 Nov 19 2012 9:25AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-341-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK TANK (TANK #R0624) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-341-4 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-342-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0625) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-342-4 Nov 19 2012 9:25AM -- FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-343-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2035) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-343-4 - Nov 19 2012 9 25AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-344-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2036) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-344-4 : Nov 19 2012 9:25AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-345-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2037) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-345-4 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required  
Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-346-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2038) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-346-4 Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-347-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2039) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-347-4 : Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-348-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2040) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-348-4 - Nov 19, 2012 9:25AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

PERMIT NO: C-629-349-4

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

### EQUIPMENT DESCRIPTION:

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3030) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-349-4 • Nov 18 2012 9 25AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-350-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3031) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING; REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-350-4 - Nov 19 2012 9:25AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-351-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3032) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-352-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3033) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-352-4 Nov 19 2012 9:25AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-353-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3034) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-353-4 : Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-354-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3035) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-354-4 : Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-355-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3036) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-355-4 Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-356-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3037) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-356-4 - Nov 19 2012 9:26AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-357-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3038) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING; REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-358-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3039) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-358-4 : Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-359-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2006) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-359-4 : Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-360-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2007) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
\_\_\_\_\_  
DAVID WARNER, Director of Permit Services  
C-629-360-4 : Nov 21 2012 10:41AM - SWANEYJ : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-361-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2008) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-361-4 - Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-362-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2009) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-362-4 : Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-363-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2010) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-363-4 Nov 19 2012 9:26AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-364-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2011) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-364-4 Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required  
Central Regional Office • 1990 E. Gettysburg Ave. • Fresno, CA 93726 • (559) 230-5900 • Fax (559) 230-6061

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-365-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2021) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
**DAVID WARNER, Director of Permit Services**  
C-629-365-4 : Nov 19 2012 9:28AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-366-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2022) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-366-4 Nov 19 2012 9:26AM - FUKUDAD Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-367-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2041) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
**DAVID WARNER, Director of Permit Services**

C-629-367-4 : Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-368-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
 PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
 PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2042) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
 \_\_\_\_\_  
 DAVID WARNER, Director of Permit Services

C-629-368-4 : Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-369-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2043) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

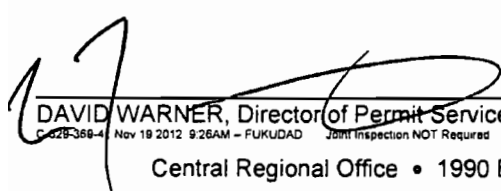
### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-369-4 Nov 19 2012 9:26AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-370-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2044) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Syed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-370-4 Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## **AUTHORITY TO CONSTRUCT**

**PERMIT NO:** C-629-371-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2045) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### **CONDITIONS**

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-371-4 Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-372-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TAN (TANK #R2046) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
\_\_\_\_\_  
DAVID WARNER, Director of Permit Services

C-629-372-4 - Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-373-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2047) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
\_\_\_\_\_  
DAVID WARNER, Director of Permit Services

C-629-373-4 Nov 19 2012 9:26AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-374-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2048) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-374-4 : Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-375-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2049) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-375-4 : Nov 19 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-376-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2050) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-376-4 - Nov 9 2012 9:28AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit





# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-377-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2051) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-377-4 : Nov 9 2012 9:27AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-378-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2052) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services  
C-629-378-4 Nov 19 2012 9:27AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-379-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/ STORAGE TANK (TANK #R2053) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Authority to Construct (ATC) C-629-379-2 shall be implemented concurrently, or prior to the modification authorized by this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
4. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
5. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-379-3 - Nov 19 2012 9:27AM - FUKUDAD - Joint Inspection NOT Required

6. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
7. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
8. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
12. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
14. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
15. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
16. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
17. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
18. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
19. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



20. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
21. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
22. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
23. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-380-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2054) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Authority to Construct (ATC) C-629-380-2 shall be implemented concurrently, or prior to the modification authorized by this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
4. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
5. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services

C-629-380-3: Nov 21 2012 10:46AM - SWANEYJ : Joint Inspection NOT Required

6. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
7. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
8. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
12. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
14. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
15. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
16. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
17. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
18. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
19. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

20. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
21. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
22. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
23. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-381-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**  
MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2055) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


## CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
\_\_\_\_\_  
DAVID WARNER, Director of Permit Services  
C-629-381-4 No. 19 2012 9:27AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** C-629-382-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2056) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION


### CONDITIONS

1. This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

  
DAVID WARNER, Director of Permit Services



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit



- Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201]
- The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201]
- The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201]
- If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201]
- Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201]

The proposed change stated above will not affect the quantity of emissions or change the method of operation of the permit units. Therefore this is not an NSR modification and is not subject to NSR review.

The facility currently has unimplemented ATC's for units C-629-379-0, -1, -2 and -380-0, -1, -2. Therefore, the ATC's for these two units will contain a permit condition requiring that the latest ATC's (C-629-379-2 and -380-2) be implemented prior to the implementation of the ATC's issued in this project.

O'Neill Beverages Company LLC received their Title V Permit on July 31, 2010. This modification can be classified as a Title V significant modification pursuant to Rule 2520, Section 3.29, and can be processed with a Certificate of Conformity (COC). Since the facility has specifically requested that this project be processed in that manner, the 45-day EPA comment period will be satisfied prior to the issuance of the Authority to Construct. O'Neill Beverages Company LLC must apply to administratively amend their Title V Operating Permit to include the requirements of the ATC(s) issued with this project.

## II. Applicable Rules

District Rule 2201 New and Modified Stationary Source Review Rule (4/21/11)  
District Rule 2520 Federally Mandated Operating Permits (6/21/01)  
District Rule 4001 New Source Performance Standards (4/14/99)  
District Rule 4002 National Emissions Standards for Hazardous Air Pollutants (5/20/04)  
District Rule 4101 Visible Emissions (2/17/05)  
District Rule 4102 Nuisance (12/17/92)  
District Rule 4694 Wine Fermentation and Storage Tanks (12/15/05)  
California Health and Safety Code Section 41700 (Health Risk Assessment)  
California Health & Safety Code Section 42301.6 (School Notice)  
Public Resources Code 21000-21177 California Environmental Quality Act (CEQA)  
California Code of Regulations, Title 14, Division 6, Chapter 3, Sections 15000-15387: CEQA Guidelines

## III. Project Location

This facility is located at 8418 S. Lac Jac Road in Parlier, CA.

The District has verified that the equipment is located within 1,000 feet of the outer boundary of a K-12 school. However, the modifications proposed in this project do not result in an increase in Hazardous Air Pollutant (HAP) emissions. Therefore, in accordance with the California Health and Safety Code, Section 42301.6, a school notice is not required.

## IV. Process Description

O'Neill Beverages Co. produces both red and white table wines, as well as other specialty wine products, from the fermentation of grapes. During the "crush season", typically from late August to late November, both red and white grapes are received by truck and delivered to a crusher-stemmer which serves to crush the grapes and remove the stems. In the case of red wines, the resultant juice (termed "must" and containing the grape skins, pulp and seeds) is pumped to red wine fermentation tanks for fermentation, a batch process. The red wine fermentation tanks are specifically designed to ferment the must in contact with the skins and to allow the separation of the skins and seeds from the wine after fermentation. In the case of white wines, the must is first sent to screens and presses for separation of grape skins and seeds prior to fermentation. After separation of the skins and seeds, the white must is transferred to a fermentation tank. White wine fermentation can be carried out in a tank without design provisions for solids separation since the skins and seeds have already been separated.

After transfer of the must (red or white) to the fermentation tank, the must is inoculated with yeast which initiates the fermentation reactions. During fermentation, the yeast metabolizes the sugar in the grape juice, converting it to ethanol and carbon dioxide and releasing heat. Although fermentation temperatures vary widely depending upon the specific quality and style of the wine, temperature is typically controlled to maintain a temperature of 45-70° F for white wine fermentation and 70-85° F for red wine fermentation. The sugar content of the fermentation mass is measured in °Brix (weight %) and is typically 22-26° for unfermented grape juice, dropping to 4°

or less for the end of fermentation. Finished ethanol concentration is approximately 10 to 14 percent by volume. Batch fermentation requires 3-5 days per batch for red wine and 1-2 weeks per batch for white wine. VOC's are emitted during the fermentation process along with the CO<sub>2</sub>. The VOC's consist primarily of ethanol along with minor fermentation byproducts.

Following the completion of fermentation, white wine is transferred directly to storage tanks. Red wine is first directed to the presses for separation of solids and then routed to the storage tanks. All tanks in the winery typically operate as two separate emissions units; 1) a fermentation operation during which the tank is vented directly to the atmosphere to release the evolved CO<sub>2</sub> byproduct from the fermentation reaction; and 2) a storage operation where the tank is closed to minimize contact with air and the contents is often refrigerated. Post-fermentation operations are conducted in the tanks including cold stabilization, racking, filtration, etc which result in a number of inter-tank transfers of the wine during this period leading up to the bottling or bulk shipment of the finished product. Storage operations are conducted year-round. VOC emissions occur primarily as a result of the inter-tank wine transfers which occur during the post fermentation operations.

## **V. Equipment Listing**

### Equipment Descriptions:

O'Neill Beverages Company is proposing to modify 90 winery tanks to remove a monthly recordkeeping condition. A summary of the post project equipment descriptions for each of the 90 tanks can be found in Appendix B.

## **VI. Emission Control Technology Evaluation**

VOC's (ethanol) are emitted from wine storage tanks as a result of both working losses (which occur when the liquid level in the tank changes) and breathing losses (expansion and contraction effects due to temperature variations). The proposed pressure/vacuum valve limits these emissions by requiring the maximum amount of variation in tank pressure before allowing the tank to vent to the atmosphere or allowing air admission to the tank. When wine storage tanks are insulated or located in a climate controlled building, breathing losses are considered to be negligible.

The temperature of the fermentation is controlled to maintain an average fermentation temperature not exceeding 95 °F which avoids higher temperatures that might be damaging to the yeast cells and reduces the potential for an out-of-control fermentation reaction in the tank. Temperature control serves to minimize VOC emissions relative to a tank without temperature control since the potential emissions increase with fermentation temperature.

## VII. General Calculations

Since the modification proposed in this project are not considered a modification per District Rule 2201, Section 3.25 calculations to demonstrate compliance with the Rule are not required. However, daily and annual potential to emit (PE) calculations will be performed in order to complete the emission profiles of both units.

## VIII. Compliance

### Rule 2201 New and Modified Stationary Source Review Rule

District Rule 2201 applies to all new stationary sources and all modifications to existing stationary sources which are subject to the District permit requirements and after construction emit or may emit one or more affected pollutant.

Pursuant to District Rule 2201 Section 3.25, *Modification*, a modification is an action including at least one of the following items:

1. Any change in hours of operation, production rate, or method of operation of an existing emission unit that would necessitate a change in permit conditions.
2. Any structural change or addition to an existing emissions unit that would necessitate a change in permit conditions.
3. An increase in emissions from an emissions unit caused by a modification of the Stationary Source when the emissions unit is not subject to a daily emissions limit.
4. Addition of any emissions unit that is subject to District permitting requirements.
5. A change in a permit term or condition proposed by an applicant to obtain an exemption from an applicable requirement to which the source would otherwise be subject.

The modification proposed in this project is the replacement of the monthly recordkeeping conditions with the new District and EPA approved conditions. The proposed permit conditions are shown below:

- Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201]
- Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201]
- The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201]

- The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201]
- If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201]
- Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201]

The addition of the provision to allow for an exceedance of the rolling 12 month limit is considered a relaxation of the recordkeeping requirements of the permit units; however it will not have any effect to the permit units' emissions or method of operation. Therefore, this modification is not considered a modification and therefore is not subject to the provisions of Rule 2201.

The following District Rule 2201 permit conditions are on the existing permits and will be carried over to the proposed permits:

- The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
- Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
- The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
- Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
- The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]



- The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 F, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]

The following daily emission limit permit conditions are on the existing permits and will be carried over to the proposed permits:

Units -289-6 through -302-6:

- The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]

Units -303-5 through -320-5, -365-4, -366-4:

- The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201]

Units -325-3 through -332-3, -343-4 through -348-4, -367-4 through -382-4:

- The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]

Units -333-4 through -338-4:

- The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]

Units -339-4 through -342-4:

- The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]

Units -349-4 through -358-4:

- The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]

Units -359-4 through -364-4:

- The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]

## **Rule 2520 Federally Mandated Operating Permits**

This facility is subject to this Rule, and has received their Title V Operating Permit. Section 3.29 defines a significant permit modification as a "permit amendment that does not qualify as a minor permit modification or administrative amendment."

Section 3.20.2 states that a minor permit modification is a permit modification that does not relax monitoring, reporting or recordkeeping requirements and are not significant changes in existing monitoring permit terms or conditions. As discussed above, the facility is proposing to replace their monthly recordkeeping requirement with new District and EPA approved rolling 12 month recordkeeping conditions. The new conditions include a provision which allows an exceedance in the rolling 12 month average if the start of the facility's crush season occurs less than 365 days after the previous crush season. Therefore, the proposed project results in a relaxing of recordkeeping requirements and does not meet the definition of a minor modification to the Title V permit. As a result, the proposed project constitutes a Significant Modification to the Title V Permit pursuant to Section 3.29.

As discussed above, the facility has applied for a Certificate of Conformity (COC); therefore, the facility must apply to modify their Title V permit with an administrative amendment, prior to operating with the proposed modifications. Continued compliance with this rule is expected. The facility shall not implement the changes requested until the final permit is issued. The following conditions will be included on the ATC to ensure continued compliance:

- This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District NSR Rule]
- Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4]

## **Rule 4001 New Source Performance Standards (NSPS)**

This rule incorporates NSPS from Part 60, Chapter 1, Title 40, Code of Federal Regulations (CFR); and applies to all new sources of air pollution and modifications of existing sources of air pollution listed in 40 CFR Part 60. However, no subparts of 40 CFR Part 60 apply to wine fermentation and storage tank operations. Therefore, no further discussion is required.

## **Rule 4002 National Emission Standards for Hazardous Air Pollutants (NESHAPs)**

This rule incorporates NESHAPs from Part 61, Chapter I, Subchapter C, Title 40, CFR and the NESHAPs from Part 63, Chapter I, Subchapter C, Title 40, CFR; and applies to all sources of hazardous air pollution listed in 40 CFR Part 61 or 40 CFR Part 63. However, no subparts of 40 CFR Part 61 or 40 CFR Part 63 apply to wine fermentation and storage tank operations. Therefore, no further discussion is required.

### **Rule 4101 Visible Emissions**

Per Section 5.0, no person shall discharge into the atmosphere emissions of any air contaminant aggregating more than 3 minutes in any hour which is as dark as or darker than Ringelmann 1 (or 20% opacity). The following existing condition on the facility wide permit will assure compliance with this rule.

- No air contaminants shall be discharged into the atmosphere for a period or periods aggregating more than 3 minutes in any one hour which is as dark or darker than Ringelmann #1 or equivalent to 20% opacity and greater, unless specifically exempted by District Rule 4101 (2/17/05). If the equipment or operation is subject to a more stringent visible emission standard as prescribed in a permit condition, the more stringent visible emission limit shall supersede this condition. [District Rule 4101]

### **Rule 4102 Nuisance**

Section 4.0 prohibits discharge of air contaminants which could cause injury, detriment, nuisance or annoyance to the public. Public nuisance conditions are not expected as a result of these operations provided the equipment is well maintained. Therefore, compliance with this rule is expected. The following existing condition on the facility wide permit will assure compliance with this rule.

- {98} No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]

### **California Health & Safety Code 41700 (Health Risk Assessment)**

District Policy APR 1905 – Risk Management Policy for Permitting New and Modified Sources specifies that for an increase in emissions associated with a proposed new source or modification, the District perform an analysis to determine the possible impact to the nearest resident or worksite.

As discussed above, there are no increases in emissions associated with this project, therefore a health risk assessment is not necessary and no further risk analysis is required.

### **District Rule 4694 Wine Fermentation and Storage Tanks**

The purpose of this rule is to reduce emissions of volatile organic compounds (VOC) from the fermentation and bulk storage of wine, or achieve equivalent reductions from alternative emission sources. This rule is applicable to all facilities with fermentation emissions in excess of 10 tons-VOC/year. The storage tank provisions of this rule apply to all tanks with capacity in excess of 5,000 gallons.

Section 5.1 requires the winery operator achieve Required Annual Emissions Reductions (RAER) equal to at least 35% of the winery's Baseline Fermentation Emissions (BFE). Per the definition of RAER in Section 3.25 of the Rule, the RAER may be achieved by any combination of Fermentation Emission Reductions (FER), Certified Emission Reductions (CER) or District

Obtained Emission Reductions (DOER) as established in the facility's District-approved Rule 4694 Compliance Plan, due every three years on December 1<sup>st</sup> beginning in 2006. The facility has submitted the required plan to the District and is currently satisfying the required emission reductions in the form of Certified Emission Reductions.

Section 5.2 places specific restrictions on wine storage tanks with 5,000 gallons or more in capacity when such tanks are not constructed of wood or concrete. Section 5.2.1 requires these tanks to be equipped and operated with a pressure-vacuum relief valve meeting all of the following requirements:

- The pressure-vacuum relief valve shall operate within 10% of the maximum allowable working pressure of the tank,
- The pressure-vacuum relief valve shall operate in accordance with the manufacturer's instructions, and
- The pressure-vacuum relief valve shall be permanently labeled with the operating pressure settings.
- The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21.

Therefore, the following conditions will be placed on the permit for each storage tank with capacity greater than 5,000 gallons and not constructed of concrete or wood to ensure compliance with the requirements of Section 5.2.1:

- When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
- When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21 [District Rule 4694]

Section 5.2.2 requires that the temperature of the stored wine be maintained at or below 75° F.

The following condition will be placed on the permit for each storage tank with capacity greater than 5,000 gallons and not constructed of concrete or wood to ensure compliance with the requirements of Section 5.2.2:

- The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]

Every three years, Section 6.1 and 6.2 require the facility to submit a Three-Year Compliance Plan and a Three-Year Compliance Plan Verification respectively. Section 6.3 requires that an Annual Compliance Plan Demonstration be submitted to the District no later than February 1 of each year to show compliance with the applicable requirements of the Rule. Section 6.4 requires that records required by this rule be maintained, retained on-site for a minimum of five years, and made available to the APCO upon request. Section 6.4.3 requires that all monitoring be performed for any Certified Emission Reductions as identified in the facility's Three-Year Compliance Plan and that the records of all monitoring be maintained. The following conditions on the facility-wide permit (C-629-0-1) ensure compliance:

- A Three-Year Compliance Plan that demonstrates compliance with the requirements of Section 5.1 of District Rule 4694 for each year of the applicable compliance period shall be submitted to the District by no later than December 1, 2006, and every three years thereafter on or before December 1. [District Rule 4694]
- A Three-Year Compliance Plan Verification that demonstrates that the Three-Year Compliance Plan elements are in effect shall be submitted to the District by no later than July 1, 2007, and every three years thereafter on or before July 1. [District Rule 4694]
- An Annual Compliance Plan Demonstration that shows compliance with the applicable requirements of this rule shall be submitted to the District by no later than February 1, 2008, and every year thereafter on or before February 1. [District Rule 4694]
- Operators using CER to mitigate fermentation emissions shall perform all monitoring and recordkeeping, as established in their approved Three-Year Compliance Plan, and shall maintain all records necessary to demonstrate compliance. [District Rule 4694]
- The operator shall retain records of all required monitoring data and support information for a period of at least 5 years from the date of the monitoring sample, measurement, or report. Support information includes copies of all reports required by the permit and, for continuous monitoring instrumentation, all calibration and maintenance records and all original strip-chart recordings [District Rule 2520, 9.4.2]

Section 6.4.1 requires that records be kept for each fermentation batch. The following condition will be placed on the ATC for each fermentation tank to ensure compliance:

- For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]

Section 6.4.2 requires that weekly records be kept of wine volume and temperature in each storage tank. All tanks in this facility are storage tanks. Therefore, the following conditions will be placed on the permit for each storage tank to ensure compliance with the requirements of Section 6.4.2:

- When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
- When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine.[District Rule 4694]

Section 6.4.3 requires that all monitoring be performed for any Certified Emission Reductions as identified in the facility's Three-Year Compliance Plan and that the records of all monitoring be maintained. The following condition on the facility-wide permit (C-629-0-1) ensures compliance:

- Operators using CER to mitigate fermentation emissions shall perform all monitoring and recordkeeping, as established in their approved Three-Year Compliance Plan, and shall maintain all records necessary to demonstrate compliance. [District Rule 4694]

### **California Health & Safety Code 42301.6 (School Notice)**

The District has verified that this site is located within 1,000 feet of the following school:

School Name: Riverview Elementary School  
Address: 8662 S. Lac Jac Avenue  
Parlier, CA 93648

However, as discussed within this document, the modifications proposed in this project do not result in an increase in emissions. Therefore, in accordance with the California Health and Safety Code, Section 42301.6, a school notice is not required.

### **California Environmental Quality Act (CEQA)**

#### **Greenhouse Gas Significance Determination**

The modifications proposed by the facility in this project will only affect the recordkeeping schedule of VOC emissions. There will not be any physical changes or changes in the operation that will affect emissions of criteria pollutants or project specific greenhouse gases. The District therefore concludes that the project would have a less than cumulatively significant impact on global climate change.

## District CEQA Findings

CEQA requires each public agency to adopt objectives, criteria, and specific procedures consistent with CEQA Statutes and the CEQA Guidelines for administering its responsibilities under CEQA, including the orderly evaluation of projects and preparation of environmental documents. The District adopted its *Environmental Review Guidelines* (ERG) in 2001. The basic purposes of CEQA are to:

- Inform governmental decision-makers and the public about the potential, significant environmental effects of proposed activities;
- Identify the ways that environmental damage can be avoided or significantly reduced;
- Prevent significant, avoidable damage to the environment by requiring changes in projects through the use of alternatives or mitigation measures when the governmental agency finds the changes to be feasible; and
- Disclose to the public the reasons why a governmental agency approved the project in the manner the agency chose if significant environmental effects are involved.

The District performed an Engineering Evaluation (this document) for the proposed project and determined that the activity will occur at an existing facility and the project involves negligible expansion of the existing use. Furthermore, the District determined that the activity will not have a significant effect on the environment. The District finds that the activity is categorically exempt from the provisions of CEQA pursuant to CEQA Guideline § 15031 (Existing Facilities), and finds that the project is exempt per the general rule that CEQA applies only to projects which have the potential for causing a significant effect on the environment (CEQA Guidelines §15061(b)(3)).

## IX. Recommendation

Compliance with all applicable rules and regulations is expected. Pending a successful Certificate of Conformity noticing period, issue Authorities to Construct C-629-289-6 through -302-6, -303-5 through -320-5, -325-3 through -332-3, -333-4 through -378-4, -379-3, -380-3, -381-4, and -382-4 subject to the permit conditions on the attached draft Authorities to Construct in Appendix C.

**X. Billing Information**

<b>Permit Number</b>	<b>Fee Schedule</b>	<b>Fee Description</b>	<b>Annual Fee</b>
C-629-289-6	3020-05-E	195,216 gallons	\$246
C-629-290-6	3020-05-E	198,000 gallons	\$246
C-629-291-6	3020-05-E	198,000 gallons	\$246
C-629-292-6	3020-05-E	198,000 gallons	\$246
C-629-293-6	3020-05-E	198,000 gallons	\$246
C-629-294-6	3020-05-E	198,000 gallons	\$246
C-629-295-6	3020-05-E	198,000 gallons	\$246
C-629-296-6	3020-05-E	198,000 gallons	\$246
C-629-297-6	3020-05-E	198,000 gallons	\$246
C-629-298-6	3020-05-E	198,000 gallons	\$246
C-629-299-6	3020-05-E	198,000 gallons	\$246
C-629-300-6	3020-05-E	198,000 gallons	\$246
C-629-301-6	3020-05-E	198,000 gallons	\$246
C-629-302-6	3020-05-E	198,000 gallons	\$246
C-629-303-5	3020-05-E	121,000 gallons	\$246
C-629-304-5	3020-05-E	121,000 gallons	\$246
C-629-305-5	3020-05-E	121,000 gallons	\$246
C-629-306-5	3020-05-E	121,000 gallons	\$246
C-629-307-5	3020-05-C	45,500 gallons	\$135
C-629-308-5	3020-05-C	45,500 gallons	\$135
C-629-309-5	3020-05-C	45,500 gallons	\$135
C-629-310-5	3020-05-C	45,500 gallons	\$135
C-629-311-5	3020-05-C	45,500 gallons	\$135
C-629-312-5	3020-05-C	45,500 gallons	\$135
C-629-313-5	3020-05-C	45,500 gallons	\$135
C-629-314-5	3020-05-C	45,500 gallons	\$135
C-629-315-5	3020-05-C	45,500 gallons	\$135
C-629-316-5	3020-05-C	45,500 gallons	\$135
C-629-317-5	3020-05-E	121,000 gallons	\$246
C-629-318-5	3020-05-E	121,000 gallons	\$246
C-629-319-5	3020-05-E	121,000 gallons	\$246
C-629-320-5	3020-05-E	121,000 gallons	\$246
C-629-325-3	3020-05-D	86,780 gallons	\$185
C-629-326-3	3020-05-D	86,780 gallons	\$185
C-629-327-3	3020-05-D	86,780 gallons	\$185
C-629-328-3	3020-05-D	86,780 gallons	\$185
C-629-329-3	3020-05-D	86,780 gallons	\$185
C-629-330-3	3020-05-D	86,780 gallons	\$185
C-629-331-3	3020-05-D	86,780 gallons	\$185
C-629-332-3	3020-05-D	86,780 gallons	\$185
C-629-333-4	3020-05-B	6,500 gallons	\$93



C-629-334-4	3020-05-B	6,500 gallons	\$93
C-629-335-4	3020-05-B	6,500 gallons	\$93
C-629-336-4	3020-05-B	6,500 gallons	\$93
C-629-337-4	3020-05-B	6,500 gallons	\$93
C-629-338-4	3020-05-B	6,500 gallons	\$93
C-629-339-4	3020-05-E	196,000 gallons	\$246
C-629-340-4	3020-05-E	196,000 gallons	\$246
C-629-341-4	3020-05-E	196,000 gallons	\$246
C-629-342-4	3020-05-E	196,000 gallons	\$246
C-629-343-4	3020-05-D	86,780 gallons	\$185
C-629-344-4	3020-05-D	86,780 gallons	\$185
C-629-345-4	3020-05-D	86,780 gallons	\$185
C-629-346-4	3020-05-D	86,780 gallons	\$185
C-629-347-4	3020-05-D	86,780 gallons	\$185
C-629-348-4	3020-05-D	86,780 gallons	\$185
C-629-349-4	3020-05-B	13,300 gallons	\$93
C-629-350-4	3020-05-B	13,300 gallons	\$93
C-629-351-4	3020-05-B	13,300 gallons	\$93
C-629-352-4	3020-05-B	13,300 gallons	\$93
C-629-353-4	3020-05-B	13,300 gallons	\$93
C-629-354-4	3020-05-B	13,300 gallons	\$93
C-629-355-4	3020-05-B	13,300 gallons	\$93
C-629-356-4	3020-05-B	13,300 gallons	\$93
C-629-357-4	3020-05-B	13,300 gallons	\$93
C-629-358-4	3020-05-B	13,300 gallons	\$93
C-629-359-4	3020-05-C	45,226 gallons	\$135
C-629-360-4	3020-05-C	45,226 gallons	\$135
C-629-361-4	3020-05-C	45,226 gallons	\$135
C-629-362-4	3020-05-C	45,226 gallons	\$135
C-629-363-4	3020-05-C	45,226 gallons	\$135
C-629-364-4	3020-05-C	45,226 gallons	\$135
C-629-365-4	3020-05-E	120,000 gallons	\$246
C-629-366-4	3020-05-E	120,000 gallons	\$246
C-629-367-4	3020-05-D	87,000 gallons	\$185
C-629-368-4	3020-05-D	87,000 gallons	\$185
C-629-369-4	3020-05-D	87,000 gallons	\$185
C-629-370-4	3020-05-D	87,000 gallons	\$185
C-629-371-4	3020-05-D	87,000 gallons	\$185
C-629-372-4	3020-05-D	87,000 gallons	\$185
C-629-373-4	3020-05-D	87,000 gallons	\$185
C-629-374-4	3020-05-D	87,000 gallons	\$185
C-629-375-4	3020-05-D	87,000 gallons	\$185
C-629-376-4	3020-05-D	87,000 gallons	\$185
C-629-377-4	3020-05-D	87,000 gallons	\$185
C-629-378-4	3020-05-D	87,000 gallons	\$185

C-629-379-3	3020-05-D	87,000 gallons	\$185
C-629-380-3	3020-05-D	87,000 gallons	\$185
C-629-381-4	3020-05-D	87,000 gallons	\$185
C-629-382-4	3020-05-D	87,000 gallons	\$185

**Appendixes**

- A: Current PTOs
- B: Post Project Equipment Descriptions
- C: Draft ATCs
- D: EPA Comments and District Responses

## **APPENDIX A**

### **Current PTOs**

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-289-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

195,216 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 306) WITH PRESSURE VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-290-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 307) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-291-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 308) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-292-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 309) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-293-5

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 310) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-294-5

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 311) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-295-5

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 312) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-296-5

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 313) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-297-5

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 314) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-298-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 315) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-299-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 316) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-300-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 317) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-301-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 318) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-302-5

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 319) WITH PRESSURE VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-303-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2017)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-304-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2018)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-305-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2019)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-306-4

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2020)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-307-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2001)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-308-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2002)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-309-4

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2003)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-310-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2004)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-311-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2005)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-312-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2012)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-313-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2013)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-314-4

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2014)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-315-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2015) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-316-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2016) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-317-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2023) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-318-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2024) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-319-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2025) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-320-4

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2026) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-325-2

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2027) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-326-2

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R2028) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-327-2

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2029) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-328-2

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2030) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-329-2

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2031) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-330-2

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2032) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-331-2

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2033) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-332-2

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2034) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
5. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
6. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201] Federally Enforceable Through Title V Permit
7. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201] Federally Enforceable Through Title V Permit
8. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
9. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
14. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
15. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
16. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
17. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201] Federally Enforceable Through Title V Permit
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-333-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0290) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-334-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0291) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-335-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0292) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-336-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0293) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-337-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0294) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-338-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0295) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-339-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0622) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-340-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0623) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-341-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK TANK (TANK #R0624)  
WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-342-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0625) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-343-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2035) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-344-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2036) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-345-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2037) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-346-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2038) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-347-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2039) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-348-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2040) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-349-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3030) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-350-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3031) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-351-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3032) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-352-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3033) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-353-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3034) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-354-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3035) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-355-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3036) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-356-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3037) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING:

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-357-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3038) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-358-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3039) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING:

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-359-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2006) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-360-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2007) WITH PRESSURE/VACUUM VALVE AND INSULATION: ADD THE ABILITY TO USE TANK FOR WINE FERMENTATION AND INCLUDE IN THE EXISTING FACILITY-WIDE FERMENTATION VOC SLC:

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-361-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2008) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-362-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2009) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-363-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2010) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-364-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2011) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-365-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2021) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-366-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2022) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-367-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2041) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-368-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2042) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-369-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2043) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-370-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2044) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-371-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2045) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-372-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TAN (TANK #R2046) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-373-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2047) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-374-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2048) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-375-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2049) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-376-3

EXPIRATION DATE: 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2050) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-377-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2051) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-378-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2052) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-381-3

EXPIRATION DATE: 07/31/2015

## EQUIPMENT DESCRIPTION:

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2055) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.



12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-382-3

**EXPIRATION DATE:** 07/31/2015

**EQUIPMENT DESCRIPTION:**

87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2056) WITH PRESSURE/VACUUM VALVE AND INSULATION

## PERMIT UNIT REQUIREMENTS

---

1. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201]
2. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201]
3. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201]
4. The VOC emissions rate for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201]
5. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 lb per year. [District Rule 2201]
6. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = (Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal) + (Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal). [District Rule 2201]
7. The ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201]
8. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201]
9. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
10. When used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
11. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 oF, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201]
13. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694]
14. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382 and those records shall be updated at least once per month. [District Rule 2201]
15. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694]
16. When used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
17. When used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
18. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

## **APPENDIX B**

### **Post Project Equipment Descriptions**

Permit	Equipment Description
C-629-289-6	195,216 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 306) WITH PRESSURE VACUUM VALVE AND INSULATION
C-629-290-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 307) WITH PRESSURE VACUUM VALVE
C-629-291-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 308) WITH PRESSURE VACUUM VALVE
C-629-292-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 309) WITH PRESSURE VACUUM VALVE
C-629-293-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 310) WITH PRESSURE VACUUM VALVE
C-629-294-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 311) WITH PRESSURE VACUUM VALVE
C-629-295-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 312) WITH PRESSURE VACUUM VALVE
C-629-296-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 313) WITH PRESSURE VACUUM VALVE
C-629-297-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 314) WITH PRESSURE VACUUM VALVE
C-629-298-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 315) WITH PRESSURE VACUUM VALVE
C-629-299-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 316) WITH PRESSURE VACUUM VALVE
C-629-300-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 317) WITH PRESSURE VACUUM VALVE
C-629-301-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 318) WITH PRESSURE VACUUM VALVE
C-629-302-6	198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 319) WITH PRESSURE VACUUM VALVE
C-629-303-5	121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2017) WITH PRESSURE/VACUUM VALVE AND INSULATION

C-629-304-5	121,000 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2018)	WITH
C-629-305-5	121,000 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2019)	WITH
C-629-306-5	121,000 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2020)	WITH
C-629-307-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2001)	WITH
C-629-308-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2002)	WITH
C-629-309-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2003)	WITH
C-629-310-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2004)	WITH
C-629-311-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2005)	WITH
C-629-312-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2012)	WITH
C-629-313-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2013)	WITH
C-629-314-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE # R-2014)	WITH
C-629-315-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE R-2015)	WITH
C-629-316-5	45,500 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE R-2016)	WITH
C-629-317-5	121,000 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE R-2023)	WITH
C-629-318-5	121,000 GALLON STAINLESS STEEL RED FERMENTATION/STORAGE TANK (TANK PRESSURE/VACUUM VALVE AND INSULATION	AND WHITE WINE R-2024)	WITH

C-629-319-5	121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2025) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-320-5	121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2026) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-325-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2027) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-326-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R2028) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-327-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2029) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-328-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2030) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-329-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2031) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-330-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2032) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-331-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2033) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-332-3	86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2034) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-333-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0290) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-334-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0291) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-335-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0292) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-336-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0293) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-337-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0294) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING

C-629-338-4	6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0295) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-339-4	196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0622) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-340-4	196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0623) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-341-4	196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK TANK (TANK #R0624) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-342-4	196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0625) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-343-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2035) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-344-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2036) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-345-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2037) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-346-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2038) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-347-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2039) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-348-4	86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2040) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-349-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3030) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-350-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3031) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-351-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3032) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING



C-629-352-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3033) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-353-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3034) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-354-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3035) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-355-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3036) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-356-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3037) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING:
C-629-357-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3038) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING
C-629-358-4	13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3039) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING:
C-629-359-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2006) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-360-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2007) WITH PRESSURE/VACUUM VALVE AND INSULATION: ADD THE ABILITY TO USE TANK FOR WINE FERMENTATION AND INCLUDE IN THE EXISTING FACILITY-WIDE FERMENTATION VOC SLC:
C-629-361-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2008) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-362-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2009) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-363-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2010) WITH PRESSURE/VACUUM VALVE AND INSULATION

C-629-364-4	45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2011) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-365-4	120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2021) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-366-4	120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2022) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-367-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2041) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-368-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2042) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-369-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2043) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-370-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2044) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-371-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2045) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-372-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TAN (TANK #R2046) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-373-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2047) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-374-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2048) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-375-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2049) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-376-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2050) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-377-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2051) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-378-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2052) WITH PRESSURE/VACUUM VALVE AND INSULATION

ATC C-629-379-3	87,000 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #R2053) WITH PRESSURE/VACUUM VALVE AND INSULATION
ATC C-629-380-3	87,000 GALLON STEEL RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK (TANK #R2054) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-381-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2055) WITH PRESSURE/VACUUM VALVE AND INSULATION
C-629-382-4	87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2056) WITH PRESSURE/VACUUM VALVE AND INSULATION

## **APPENDIX C**

### **Draft ATCs**

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-289-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 195,216 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 306) WITH PRESSURE VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-289-6 · Nov 19 2012 9:34AM - FUKUDAD · Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-290-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 307) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-290-6: Nov 19 2012 9:34AM - FUKUDAD - Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-291-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 308) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-291-6 Nov 19 2012 9:34AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-292-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 309) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-292-6 Nov 19 2012 9:34AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-293-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 310) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-293-6 : Nov 19 2012 9:34AM - FUKUOAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-294-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 311) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-294-6 - Nov 19 2012 9:34AM - FLUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-295-6

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 312) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-295-6 : Nov 19 2012 9:34AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-296-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 313) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-296-6 : Nov 19 2012 9:34AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-297-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 314) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-297-6 - Nov 19 2012 9:34AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-298-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 315) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-298-6 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-299-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 316) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-299-6 : Nov 19 2012 9:35AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-300-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 317) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-300-6 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-301-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 318) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-301-6 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-302-6

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 198,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK 319) WITH PRESSURE VACUUM VALVE: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-302-6 Nov 19 2012 9:35AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-303-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2017) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-303-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-304-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2018) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-304-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-305-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2019) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-305-5 - Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-306-5

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2020) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-306-5 Nov 19 2012 9:35AM -- FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-307-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2001) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-307-5; Nov 19 2012 9:35AM - FUKUDAD . Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-308-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2002) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-308-5 - Nov 19 2012 9:35AM - FLUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-309-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2003) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-309-5 : Nov 19 2012 9:35AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-310-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2004) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-310-5 Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-311-5

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2005) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-311-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-312-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2012) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-312-5 - Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-313-5

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

EQUIPMENT DESCRIPTION:  
MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2013) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU **MUST** NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-313-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**  
ISSUANCE DATE: 11/19/2012

**PERMIT NO:** C-629-314-5

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R-2014) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DAVID WARNER, Director of Permit Services**  
C-629-314-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-315-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2015) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-315-5, Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-316-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,500 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2016) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-316-5 - Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-317-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2023) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-317-5 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-318-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2024) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
2-629-318-5 : Nov 19 2012 9:35AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-319-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2025) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-319-5 - Nov 19 2012 9:35AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-320-5

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 121,000 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK R-2026) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-320-5: Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-325-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2027) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-325-3 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-326-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK # R2028) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-326-3 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-327-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2029) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director YAPCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-327-3, Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-328-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2030) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-328-3, Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-329-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2031) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-329-3 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-330-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2032) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-330-3 Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-331-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2033) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-331-3 : Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-332-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STAINLESS STEEL RED AND WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2034) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-332-3 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-333-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0290) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-333-4 - Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-334-4

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0291) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-334-4 : Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-335-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0292) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director VAPCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-335-4 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-336-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0293) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-336-4 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-337-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0294) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-337-4 - Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-338-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 6,500 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0295) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-338-4 Nov 19 2012 9:36AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 31,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-339-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0622) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-339-4 - Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

**PERMIT NO:** C-629-340-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0623) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-340-4 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-341-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK TANK (TANK #R0624) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-341-4 : Nov 19 2012 9:36AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-342-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 196,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R0625) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-342-4 Nov 19 2012 9:36AM - FLUKUDAD Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 392,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-343-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2035) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-343-4 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-344-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK#R2036) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-344-4 : Nov 19 2012 9:35AM -- FUJUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-345-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**  
MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2037) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-345-4 : Nov 19 2012 9:36AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-346-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2038) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-346-4 Nov 19 2012 9:38AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-347-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2039) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-347-4 - Nov 19 2012 9:38AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-348-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86,780 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2040) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-348-4 : Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-349-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3030) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-349-4 : Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-350-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3031) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-350-4 Nov 19 2012 9:35AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-351-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3032) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-351-4 Nov 19 2012 9:38AM -- FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-352-4

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC

MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3033) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-352-4 : Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-353-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3034) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-353-4 : Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**  
ISSUANCE DATE: 11/19/2012

**PERMIT NO:** C-629-354-4

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3035) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-354-4 Nov 19 2012 9 38AM - FLKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-355-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3036) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-355-4, Nov 19 2012 9:38AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-356-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3037) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-356-4 : Nov 19 2012 9:36AM - FLUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-357-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3038) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-357-4 : Nov 19 2012 9:36AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-358-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 13,300 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R3039) WITH PRESSURE/VACUUM VALVE AND INSTALLED IN A CLIMATE CONTROLLED BUILDING: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-358-4, Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 66,500 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-359-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2006) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-359-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-360-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2007) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-360-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Total annual VOC emissions from all wine fermentation operations at this facility shall not exceed 410,502 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Combined annual VOC emissions from all wine storage operations under permit units C-629-289 through C-629-382 shall not exceed 8,991 pounds per year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
17. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]
18. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
19. The permittee shall maintain records of the combined annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
20. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-361-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2008) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-361-4 Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

PERMIT NO: C-629-362-4

ISSUANCE DATE: 11/19/2012

LEGAL OWNER OR OPERATOR: O'NEILL BEVERAGES CO LLC  
MAILING ADDRESS: 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

LOCATION: 8418 S LAC JAC AVE  
PARLIER, CA 93648

EQUIPMENT DESCRIPTION:  
MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2009) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-362-4 : Nov 19 2012 9:37AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-363-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2010) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director YAPCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-363-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-364-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 45,226 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2011) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-364-4 : Nov 19 2012 9:37AM - FUJUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 135,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-365-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2021) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-365-4 - Nov 19 2012 9:37AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-366-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 120,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2022) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-366-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 363,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-367-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2041) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director, APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-387-4 : Nov 19 2012 9:37AM - FLKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-368-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2042) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-368-4 : Nov 19 2012 9:37AM -- FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-369-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2043) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-369-4 Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-370-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2044) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-370-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-371-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2045) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-371-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-372-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TAN (TANK #R2046) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-372-4 - Nov 19 2012 9:37AM - FUKUDAD - Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-373-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2047) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-373-4 Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

DRAFT

**PERMIT NO:** C-629-374-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2048) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

DRAFT

DAVID WARNER, Director of Permit Services  
C-629-374-4 · Nov 19 2012 9:37AM - FUKUDAD · Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-375-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2049) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-375-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-376-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2050) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-376-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-377-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC

**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2051) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services

C-629-377-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required



5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-378-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2052) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-378-4, Nov 19 2012 9:37AM - FUKUDAD Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-379-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/ STORAGE TANK (TANK #R2053) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Authority to Construct (ATC) C-629-379-2 shall be implemented concurrently, or prior to the modification authorized by this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
4. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
5. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-379-3 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

6. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
7. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
8. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
12. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
14. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
15. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
16. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
17. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
18. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
19. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

20. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
21. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
22. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
23. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT



San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-380-3

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE TANK (TANK #R2054) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. Authority to Construct (ATC) C-629-379-2 shall be implemented concurrently, or prior to the modification authorized by this Authority to Construct. [District Rule 2201] Federally Enforceable Through Title V Permit
4. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
5. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-380-3, Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

6. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
7. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
8. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
11. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
12. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
13. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
14. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
15. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
16. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
17. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
18. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
19. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

DRAFT  
CONDITIONS CONTINUE ON NEXT PAGE

20. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
21. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
22. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
23. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-381-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2055) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-381-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE

19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

San Joaquin Valley  
Air Pollution Control District

**AUTHORITY TO CONSTRUCT**

**DRAFT**

**PERMIT NO:** C-629-382-4

**ISSUANCE DATE:** 11/19/2012

**LEGAL OWNER OR OPERATOR:** O'NEILL BEVERAGES CO LLC  
**MAILING ADDRESS:** 8418 S LAC JAC AVE  
PARLIER, CA 93648-9708

**LOCATION:** 8418 S LAC JAC AVE  
PARLIER, CA 93648

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 87,000 GALLON STEEL RED OR WHITE WINE FERMENTATION/STORAGE STORAGE TANK (TANK #R2056) WITH PRESSURE/VACUUM VALVE AND INSULATION: REMOVE MONTHLY UPDATING REQUIREMENT FOR ANNUAL VOC EMISSION CALCULATION

**CONDITIONS**

1. {1830} This Authority to Construct serves as a written certificate of conformity with the procedural requirements of 40 CFR 70.7 and 70.8 and with the compliance requirements of 40 CFR 70.6(c). [District Rule 2201] Federally Enforceable Through Title V Permit
2. {1831} Prior to operating with modifications authorized by this Authority to Construct, the facility shall submit an application to modify the Title V permit with an administrative amendment in accordance with District Rule 2520 Section 5.3.4. [District Rule 2520, 5.3.4] Federally Enforceable Through Title V Permit
3. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
4. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (559) 230-5950 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director APCO

**DRAFT**

DAVID WARNER, Director of Permit Services  
C-629-382-4 : Nov 19 2012 9:37AM - FUKUDAD : Joint Inspection NOT Required

5. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
6. The average fermentation temperature of each batch of must fermented in this tank shall not exceed 95 degrees Fahrenheit, calculated as the average of all temperature measurements for the batch taken at least every 12 hours over the course of the fermentation. [District Rule 2201] Federally Enforceable Through Title V Permit
7. The VOC emissions for fermentation operations in this tank shall not exceed 3.46 lb/day per 1000 gallons of tank capacity. [District Rule 2201] Federally Enforceable Through Title V Permit
8. Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
9. Total annual VOC emissions from wine fermentation operations shall be determined by the following formula: Total annual VOC emissions = [(Total Annual Red Wine Production-gal) x (6.2 lb-VOC/1000 gal)] + [(Total Annual White Wine Production-gal) x (2.5 lb-VOC/1000 gal)]. [District Rule 2201] Federally Enforceable Through Title V Permit
10. Ethanol content of wine stored in this tank shall not exceed 23.9 percent by volume. [District Rule 2201] Federally Enforceable Through Title V Permit
11. The maximum wine storage throughput in this tank shall not exceed 261,000 gallons per day. [District Rule 2201] Federally Enforceable Through Title V Permit
12. Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201] Federally Enforceable Through Title V Permit
13. The annual VOC wine storage emission factor for each wine ethanol content shall be calculated using the following equation:  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. [District Rule 2201] Federally Enforceable Through Title V Permit
14. Combined annual VOC emissions from wine storage operations under permit units C-629-289 through C-629-382 shall be determined as the sum of the emissions for each individual wine movement based on the volume transferred in each wine movement and the batch-specific wine storage emission factor calculated using the equation(s) specified within this permit. [District Rule 2201] Federally Enforceable Through Title V Permit
15. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit
16. The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201] Federally Enforceable Through Title V Permit
17. If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201] Federally Enforceable Through Title V Permit
18. When this tank is used for wine storage, daily throughput records, including records of filling and emptying operations, the dates of such operations, a unique identifier for each batch, the volume percent ethanol in the batch, and the volume of wine transferred, shall be maintained. [District Rule 4694]

CONDITIONS CONTINUE ON NEXT PAGE



19. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
20. The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201] Federally Enforceable Through Title V Permit
21. Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201] Federally Enforceable Through Title V Permit
22. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694] Federally Enforceable Through Title V Permit

DRAFT

## **APPENDIX D**

### **EPA Comments and District Responses**

## **EPA Comments / District Response**

The comments (from EPA) regarding the proposed permits for O'Neill Beverages Co, LLC (District facility C-629) is encapsulated below followed by the District's response.

### **EPA Comments – Per Email from Laura Yannayon received on May 2, 2012.**

#### **EPA's Comment #1:**

This project proposes to relax the current permit requirement to calculate annual VOC emissions on a 12-month rolling basis and instead require this calculation on a calendar year basis. We have reviewed the proposed permit to determine at what frequency the permit requires a demonstration of compliance with the applicable emission limits. The permits contain separate emission limits for two different uses of the same tanks, fermentation and wine storage.

When a tank is used for wine storage, the permits contain the following limits:

- a daily throughput limit that is specific to each group of tanks,
- a maximum ethanol content for the wine stored (23.9 % by volume), and
- an annual emission limit for a group of wine storage tanks (Group A) of 8,991 lbs/yr.

A formula is provided to calculate a wine storage emission factor, but depends on the volume percent ethanol of the wine being transferred.  $EF = 1.705259 * P^{1.090407}$ ; where EF is the VOC emission factor in pounds of VOC per 1000 gallons of wine throughput; and P is the volume percent ethanol of the wine being transferred. Using the maximum allowable ethanol content of 23.9%, the maximum EF is then 0.358 lbs VOC/1000 gallons of wine throughput. Group A units are each limited to 392,000 gal/day. Therefore, the PTE of these 14 units is 1,965 lb/day and 358 tpy (or 717225 lb/yr). This amount greatly exceeds the facility wide wine storage emission limit of 8,991 lb/yr. Since the daily throughput limits do not limit emissions to the stated annual emission limit of 8,991 lb/yr of VOC, this emission limit is not enforceable as a practical matter. EPA realizes that these calculations are based on worst case assumptions, but they are based on the limits provided in the permits intended to limit the potential to emit of this facility to match the quantity of offsets provided for this facility. Therefore the limits need to be both federally enforceable (i.e., included in the permit) and legally and practically enforceable.

When a tank(s) is used for fermentation, the permits contain the following limits:

- a daily emission limit of 3.46 lb/day per 1000 gallons of tank capacity for each tank,
- a maximum fermentation temperature for each batch of 95 degrees F, and
- an annual emission limit for all tanks of 410,502 lb/yr.

A formula is provided to calculate wine fermentation emissions, which depends on the amount of white and red wine produced. The permit does not contain any direct method of verifying the 3.46 lb/day per 1000 gal of tank capacity limit. EPA assumes that this is a conservative emission factor that applies as long as the average fermentation temperature of each batch remains below 95 degrees F, as required by a specific permit condition. The stated EF for fermentation operations, when the tank is maintained at 95% or less, is 3.46 lbs VOC/day per

/1000 gallons of tank capacity. Group A units are each sized at 198,000 gallons. Therefore the PTE of these 14 units =  $14 * 3.46 * 198 = 9,591$  lb/day which equals 3,500,759 lb/year. This amount greatly exceeds the facility wide annual wine fermentation emission limit of 410,502 lb/yr. . Since the daily throughput limits do not limit emissions to the stated annual emission limit of 410,502 lb/yr of VOC, this emission limit is not enforceable as a practical matter. EPA realizes that these calculations are based on worst case assumptions, but they based on the limits provided in the permits intended to limit the potential to emit of this facility to match the quantity of offsets provided for this facility. Therefore the limits need to be both federally enforceable (i.e., included in the permit) and legally and practically enforceable.

EPA notes that the evaluation states that “There are no underlying requirements within Rule 2201 that state that a facility must update their annual VOC emission records at least once per month. The requirements of Rule 2201 are satisfied as long as the facility maintains records with the ability to calculate their annual VOC emissions from these tanks.” While Rule 2201 does not contain a monthly recordkeeping requirement, Section 5.7.2 requires a permit to “include daily emission limitations and other enforceable conditions which reflect applicable emission limits including the offset requirements.” Since these annual emission limits are not practically enforceable without a 12 month rolling basis emission limit, the proposed modification is not permissible pursuant to Rule 2201, Section 5.7.2.

Based on our review of the proposed project we have determined that the proposed change may not be made to the current permits. Please deny the permit applications for this action.

In addition, the evaluation stated that “there are no other wineries that the District has permitted that have this monthly recordkeeping updating requirement.” Again, pursuant to Rule 2201, Section 5.7.2, if these limits are imposed to ensure the correct amount of offsets were provided, then the permits must have enforceable recordkeeping requirements to limit their potential to emit. When the District has Title V permits open for other wineries, (and no later than upon Title V permit renewal), the District must revise these permits to include recordkeeping on at least a 12 month rolling basis to make the permit conditions practically enforceable.

### **District's Response:**

The District has added the following permit conditions which will require the facility to show compliance with their annual emissions limit on a 12-month rolling basis:

- Annual emissions from all wine fermentation operations at this facility, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 410,502 lb/year. [District Rule 2201]
- Annual emissions from all wine storage operations under permit units C-629-289 through C-629-382, calculated on a twelve month rolling basis, shall not exceed the following limit: VOC - 8,991 lb/year. [District Rule 2201]
- The permittee shall maintain records of the combined twelve month rolling annual VOC emissions for permit units C-629-289 through C-629-382. [District Rule 2201]

- The permittee shall maintain the following records: red wine and white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury; the volume and the ethanol concentration of each wine movement; and the calculated 12 month rolling VOC emission rate (lb-VOC per 12 month rolling period, calculated monthly). [District Rule 2201]
- If the emissions calculated for any rolling 12-month period exceed the annual emissions limitations of this permit, in a crush season in which the start of the crush season (defined as the day on which the facility's seasonal crushing/fermentation operations commence) occurs less than 365 days after the start of the previous crush season, then no violation of the annual emissions limit for that rolling 12-month period will be deemed to have occurred so long as the calendar year emissions are below the annual emissions limitation. [District Rule 2201]
- Records shall be maintained that demonstrate the date of each year's start of crush season. [District Rule 2201]